


trapKAT 4

trapKAT 5KS Manual

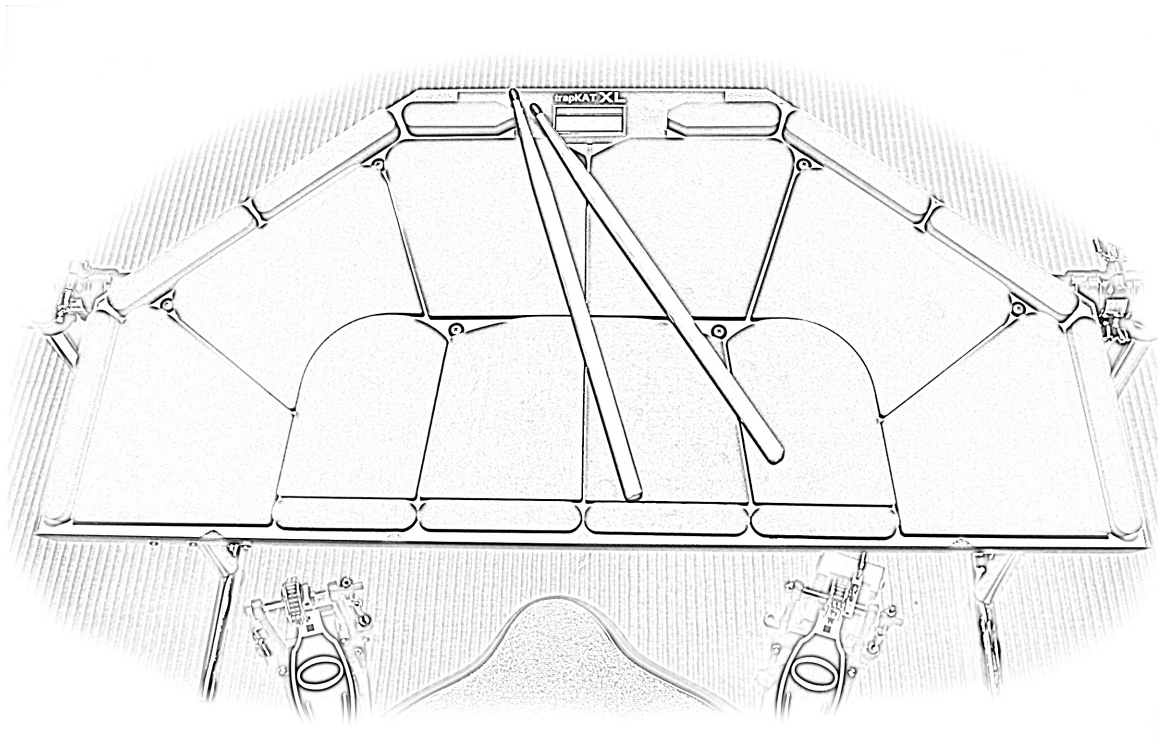

INTRODUCTION

PAD LAYOUTS	6,7
INTRODUCTION	8
QUICK START	9
TRAPKAT v4 WITHOUT SOUNDS	9
CONNECTIONS.....	10
THE MANUAL.....	12
20 QUESTIONS MOST OFTEN ASKED	
What are the Pad Numbers	13
Get My HiHAT to Work	13
Get My Bass Drum Pedal to Work.....	13
Get theTrapKAT to Respond to My Playing Style.....	14
Reset The TrapKAT.....	14
Go Between Factory and User Kits.....	15
Quick Click.....	15
Save a Kit	15
Change the Sounds	15
Managing Kit Names.....	17
Changing Note Numbers Don't Do Anything.....	17
The trapKAT is Playing Itself.....	17
Control Individual Drum Volumes and Effects.....	18
The Difference Between Training and Velocity Settings.....	18
I Don't Hear Any Sounds on my 5KS.....	18
I Don't Hear any Sounds on My Sound Source.....	18
There is a Big Delay when I use my Computer.....	19
What's a Groove, Can I make my own.....	19
Get Rid of the Beeper Sound.....	19
Back up my User Kits.....	20

KIT EDIT FUNCTIONS

KIT EDIT FUNCTION LISTING.....	21
MIDI CHANNEL.....	21
KIT VELOCITY.....	22
Minimum Velocity	
Maximum Velocity	
Velocity Curves	
FOOT CONTROL CURVES.....	23
SPECIAL CURVES.....	23
Multi Modes	
Multi Notes	
Xfade	
3 Note Layer	
Note Shift	
4 Note Layer	
Alternate Modes.....	24
Continuous Data.....	25
Cntrl+3 Notes.....	25
HiHAT CONTROL.....	26
General MIDI HiHAT	
Continuous Control	
HatNote	
Selecting Pads to the HiHAT Pads	
Defining Settings for Open Closed and Chick	
Continuous HiHAT Control	
HatNote	
HatNote Overlap	
COPY KITS.....	28
SOUND CONTROL	28
Volume Change	
Bank Changes (MSB/LSB)	
Program Change	

KURZWEIL SOUND CONTROL.....	29
Filter	
Pitch	
Drum Volumes	
FX/Reverb	
KIT NAMING.....	30
ALL NOTES OFF.....	30
PAD GATE TIME.....	31
Milliseconds	
Roll Mode	
Infinite Mode	
Latch Mode	
HIDDEN FUNCTIONS.....	31
HiHAT Training Results	
Idle Levels	

GLOBAL EDIT FUNCTIONS

GLOBAL EDIT FUNCTION LISTINGS.....	33
USER /FACTORY KITS.....	33
GROOVE ENABLE.....	34
MEMORY PROTECT.....	34
MIDI MERGE.....	34
SPLASH ADJUST.....	35
PROGRAM CHANGE RECEIVE.....	35
CYMBAL CHOCKING.....	35
GROOVE VOLUME.....	35

MEMORY DATA DUMPS.....	35
PAD TRAINING.....	36
PAD THRESHOLD.....	37
PAD LOW AND HIGH DYNAMICS.....	39
REINITIALIZE.....	38
GENERAL MIDI NAMES.....	38
TRAIN HiHAT PEDAL.....	38
BASS DRUM TRIGGER GAIN.....	38
DISPLAY ANGLE.....	39
BEEPER.....	39
SAVE USER KIT.....	39
PAD LINKING.....	39

NOTE EDIT FUNCTIONS

HEAR SOUND.....	40
SPECIAL NOTE NUMBERS.....	40
No	
Sequence Start, Stop and Continue	
Alternate Reset	
Alternate Freeze	
Kit Advance, Kit Backwards	
Pitch Wheel	
Program Advance, Program Backup	
NOTE SLOTS.....	41

KIT SELECTION


KIT SELECT FOOTSWITCH.....	41
----------------------------	----

APPENDIX

GLOSSARY OF TERMS.....	43
MIDI FOR PERCUSSION.....	46
INSERTING NEW SOFTWARE CHIPS.....	48
WARRANTY POLICIES.....	49
CUSTOMER SERVICE.....	50
SOUND LISTINGS ON THE KURZWEIL SOUND ENGINE.....	51


GLOBAL EDIT PAD LAYOUT

Hold down the GLOBAL EDIT footswitch and hit a pad to access these functions.

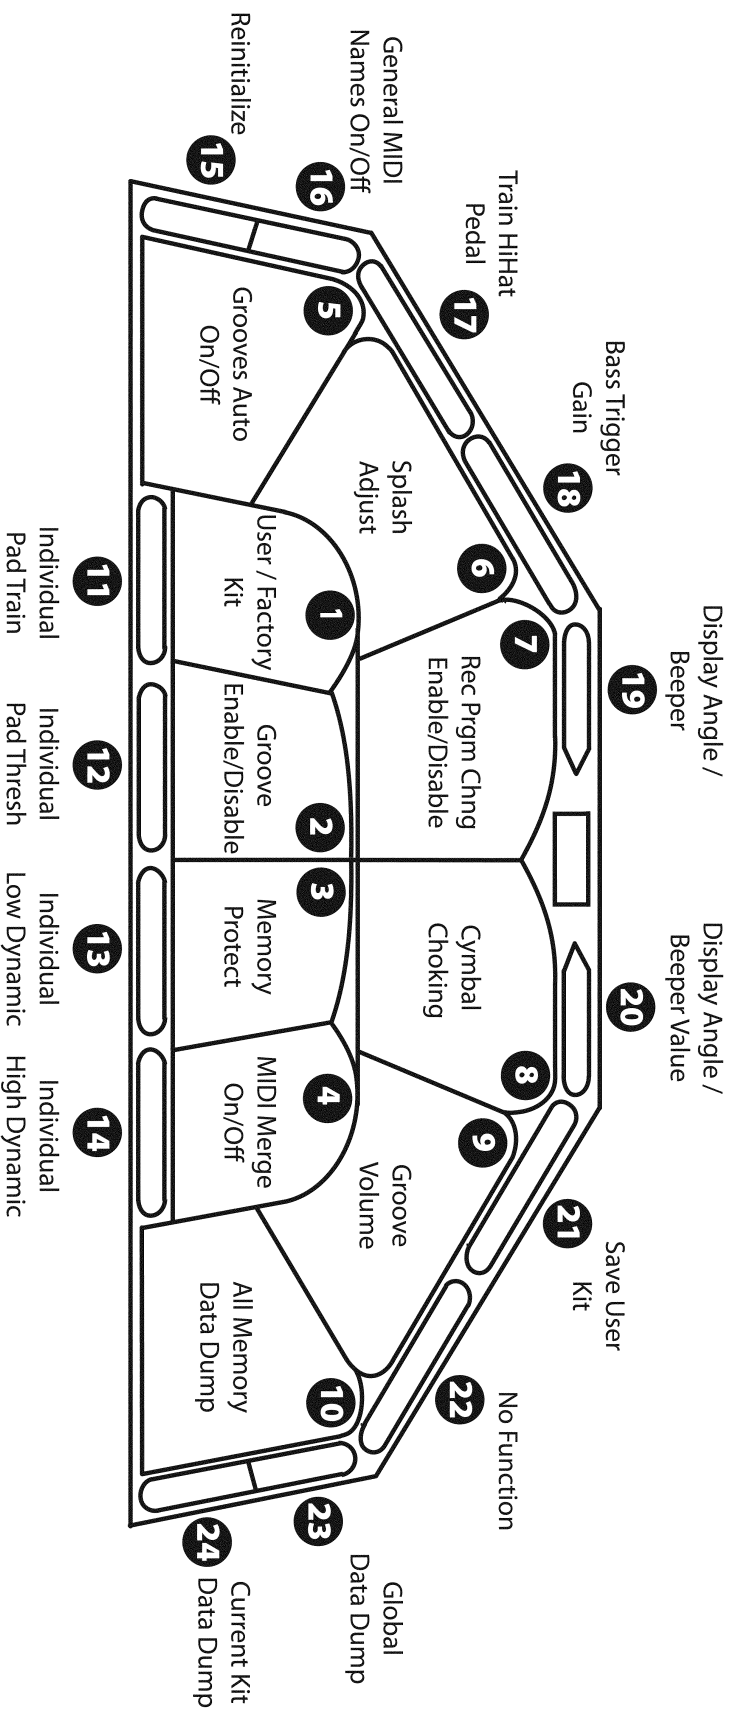

KIT EDIT PAD LAYOUT

Hold down the *KIT EDIT* footswitch and hit a pad to access these functions.

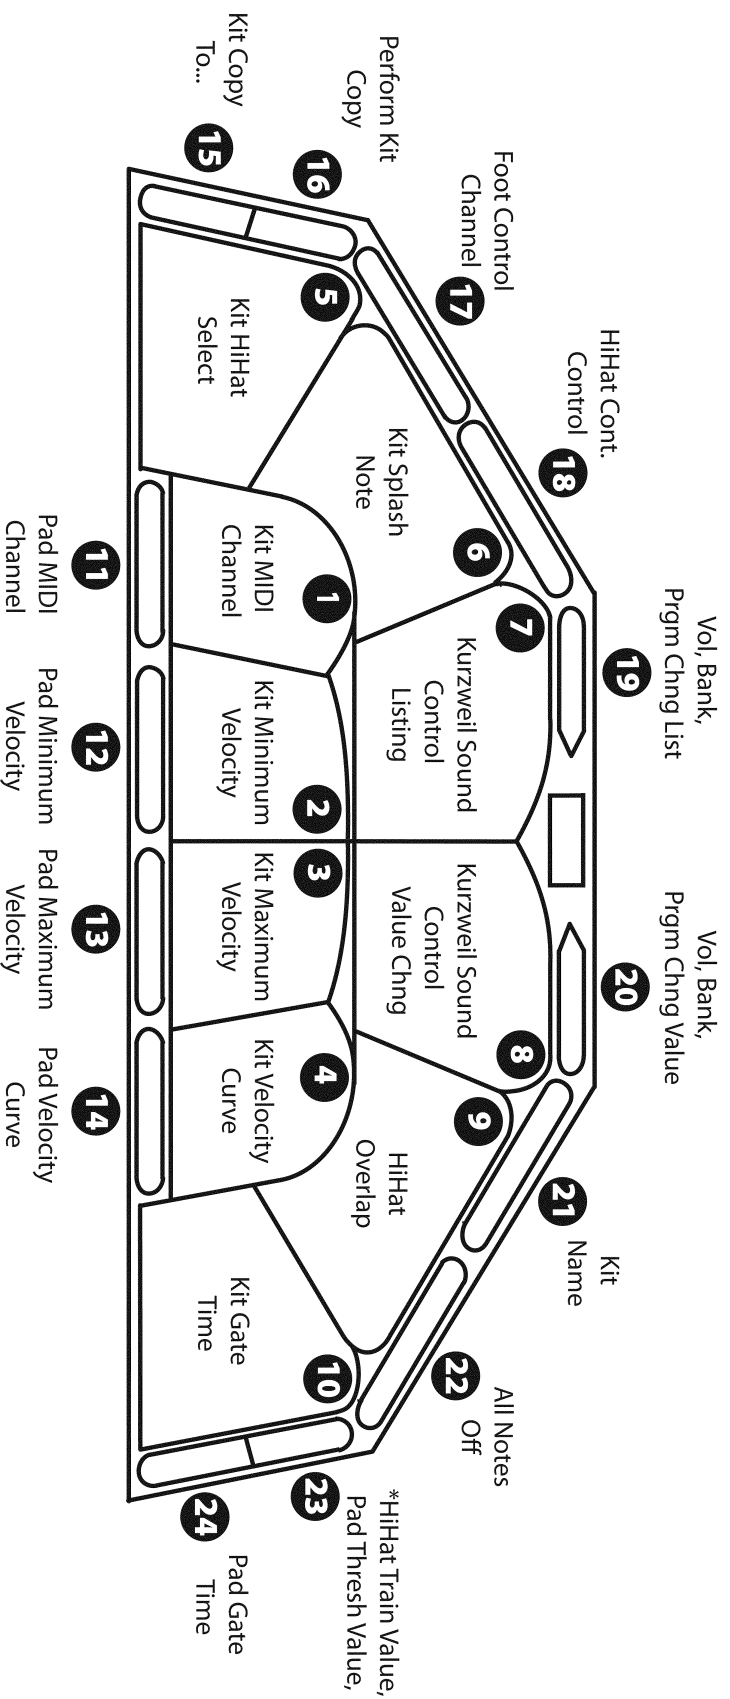

* HiHat Train Value & Pad Thresh Value will show after 2nd consecutive strike on pad.

INTRODUCTION

Welcome to Alternate Mode's trapKAT 5KS with Sounds Powered by Kurzweil. We are really excited about this revised version of the trapKAT, first introduced into the market by KAT Inc back in 1995.

Since the original trapKAT, much has changed. We now use a lightweight aluminum frame which is about 2/3rds lighter than the original trapKAT. We have replaced the original heavy gum rubber pads with our new nuBOUNCE playing surface. This new playing surface just feels great to play on. There are a 24 pads on the trapKAT, 10 large pads and 14 rim shot style pads that can be played with the shaft of your drumstick. There are also bass drum and HiHAT inputs, making a total of 26 things to play on.

Our proprietary FSR (force sense resistor) sensors have improved as well. They are now more dynamic and durable than ever before. Our new gold powered coated surface has been well received on our malletKAT and has now found its way onto the trapKAT.

Many of the drumKAT's performance features are now part of the operating system of the trapKAT. There are Alternate Modes, Velocity Switch Modes, Layering, Pad Linking as well as some Gate Control Modes such as Roll Mode and Latching for Loops. We have even added Controller Functions so that CC Data can be sent along with note data.

The real excitement of the day is that the new trapKAT 5KS has its own built in sound module. With "Sounds powered by Kurzweil", the new trapKAT has entered a whole new world. Sure it still is possible to plug your trapKAT into any MIDI sound module or soft synth plug in, but now there is a convenience factor that changes everything. Turn on the trapKAT and begin playing with no programming required. Sure you can tweak to your hearts content, but the trapKAT is now truly a turn key instrument with 24 kits ready to go. Just select a kit and play away.

The sound card in our trapKAT is the second edition of the sounds used in our malletKAT 7KS. Besides having around 1000 traditional instruments to choose from, there are about 256 drum and percussion kits to access. We've created a new "instant access" mode to get at these drum patches without having to know anything about Bank or Program Changes.

Because this Kurzweil Sound Engine was built around their PC3 keyboard platform, the trapKAT's sounds can be used for "music minus one" playing. The trapKAT has a MIDI In jack so that sequence data can be routed directly to the sound card. If you own a malletKAT, you can have access to the incredible vibes, marimbas, timpani, and orchestral percussion that also resides in the sound card, while still playing your trapKAT. The trapKAT has a 1/4" headphone jack, stereo balanced output jacks, stereo input jacks for mixing other music with the trapKAT and volume control push buttons.

Because the trapKAT 5KS is conceived as a total electronic drum set, we developed our own eHAT and eKIC pedals. These pedals are different because unlike other companies models, you can determine the pedal height and spring tension on both of them. It is the fact that you are using a real bass drum pedal that makes it feels incredibly natural and comfortable to play on. We also sell our own stand, so that a complete bundle is available for your convenience.

QUICK START

Getting setup is easy. There are two brackets that connect to the back of the trapKAT. These brackets in turn get mounted onto the brackets on your rack stand. Once you set the mounting brackets on your stand and lock them in, setting up the trapKAT will only take seconds to set up.

The trapKAT uses a screw in style power adapter (different from other KAT models). This adapter is universal so it can be used all throughout the world. Simply plug it in and turn it on.

Plug the eKIC (or another Bass Drum Trigger) into the “BASS DRUM INPUT” on your trapKAT. It requires a standard 1/4” mono cable.

Plug the eHAT (or another HiHAT Controller) into the “HAT INPUT” on your trapKAT. It also requires a standard 1/4” mono cable

Plug the supplied footswitch into the “KIT SELECT”

Use either the Headphone jack or the Audio Outputs to hear your sounds. Use the up or down buttons to control the Volume.

The trapKAT is now ready to play.

Notice that there are twenty four pads on the trapKAT. The trapKAT also has 24 Kits to play on. Each pad represents a number from 1 to 24. Every time you step on the footswitch, you jump to the next kit, from 1 to 24. You can instantly jump to any kit simply by holding down the Kit Select footswitch, and while held down, tap on any one of the pads. When you do this, the trapKAT calls up the KIT number that matches the pad number.

You are now ready to stop reading and start enjoying yourself. Please get behind the trapKAT and start playing!!!!!!

trapKAT version 4 (WITHOUT SOUNDS)

If you purchased a trapKAT without sounds, the audio jacks and headphone jacks will not be present. You will see hole covers instead. This means that you can upgrade your trapKAT if you desire to get our sound card in the future.

The trapKAT without the sound card can still easily be setup and ready to play because our FACTORY Kits have been preset to work with the General MIDI standard. This means that almost every drum machine's note numbers will match the note numbers assigned to the trapKAT's pads. Of course you can change the pads sound to any other sound, but more on that later. You can still use the KIT SELECT footswitch to change kits.

You will need to plug a MIDI cable into the MIDI OUT jack on the trapKAT into the MIDI IN input on your drum machine.

CONNECTIONS

Let's take a look at all of the connections on the back of the trapKAT. Looking at the trapKAT from the back, starting on the left you will see...

POWER SWITCH

Yes, this is your standard on/off switch. Please note that if you turn off the trapKAT KS, wait several seconds before turning it back on. The instrument needs to reset itself. If you happened to restart it too fast, the sounds might not fire up. No worries, just shut it off and wait a few seconds then all we be fine. Also notice that there is a warm up cycle. This is for the benefit of the sound card. It needs to reinitialize itself, and takes about 8 seconds before the trapKAT turns itself completely on.

AC ADAPTOR INPUT

The trapKAT comes supplied with a removable, locking AC adaptor that connects to the trapKAT and your 110v outlet. If you are in Europe, we will supply you with a different plug. The adaptor is the same however, and will automatically switch to your 220/240v operation.

The adaptor is a 15v, tip positive 2.1mm, 1.5mA adaptor. Please use OUR adaptor supplied with the trapKAT KS. Also note that current KAT users should NOT use power adaptors that came with your drumKAT, trapKAT (original) or malletKAT Pro. The sound card will not power up with it!

BASS DRUM INPUT

This is where you plug your bass drum trigger into. The input uses a ¼" mono cable. The trapKAT KS is optimized to play with the eKIC. If you have others, the trapKAT will need to be TRAINED in order to optimize your bass drum trigger. There are also GAIN controls that make the trapKAT compatible with most bass drum triggers on the market.

FOOTSWITCH INPUTS

There are 4 Footswitch Inputs built into the trapKAT KS. The trapKAT prefers MOMENTARY OPEN style footswitches. The footswitches supplied with the trapKAT are of this variety.

If you own MOMENTARY CLOSED style footswitches, they will still work, BUT you must plug them in BEFORE you turn on the trapKAT. The trapKAT reads the pedals polarity on power up and makes them work properly. If you do use a momentary closed footswitch, you should not remove them from the input while the trapKAT is on. It will think you are stepping on the footswitch!

KIT SELECT FOOTSWITCH

Using this footswitch allows you to access the trapKAT's Kits. You can access these kits in two ways. Simply step (tap) on the footswitch to increment to the next kit. The faster way to call up any kit is to hold down the footswitch and while held down, tap any pad. The pads number (1-24) will also match the Kits number (1-24). There are USER KITS and FACTORY KITS in the trapKAT. These KIT types are called up in the GLOBAL Screens.

NOTE EDIT FOOTSWITCH

Changing sounds on the trapKAT is easy. All you have to do is hold down this footswitch, and while it is held down, hit the pad that you want to change. The first time that you strike the pad, you will hear the sound that is assigned to the pad. The next time you tap on the pad (with the footswitch still held

down,) the sound will increment by one. You can play as fast as you like. You will hear the sound change each time the pad is struck.

If you pass by the sound, you can easily go backwards in the list of sounds. Simply release the footswitch and quickly hold it down again. The sounds will now play in the reverse order.

What you are actually doing is advancing through note numbers, MIDI note numbers. There are 127 notes possible. That means that you could be scrolling through up to 127 sounds on any pad. This is great for chop building! Learning to use the "Quick-click" on the footswitch for changing the direction of the sounds can come in real handy in getting the sound that you want quickly.

Notice on the display that the screen tells you what note number you are playing. The Beep Sound also changes. This is really necessary so that you know which direction you are going and how far you need to go.

You might also be seeing a name of a sound on the display. These names show up if in the GLOBAL section, GM Names are turned on. If you are not using a GM drum module (and the Kurzweil is not strictly GM), you will need to ignore these names. Its a blessing if you are using a drum machine like the Roland TD 30, or a curse if you are using a soft synth and thinking that is the sound. The trapKAT doesn't know what is plugged into its' MIDI Out port. So it is best to get into the habit of looking at the note number and not the sound name.

KIT EDIT FOOTSWITCH

You probably noticed that there aren't many buttons on the trapKAT. This footswitch turns each of the pads into a function for editing the KIT that you are playing. When you stepped on the NOTE EDIT footswitch and tapped on a pad, you saw and heard a note number. When you step on the KIT EDIT FOOTSWITCH and hit a pad, a function will be displayed. Just about every pad has a function, some have multiple functions. These will be described in the KIT EDITING section of the manual.

So think of using the KIT EDIT footswitch when you want to alter a setting in the particular kit that you are playing. Alter what you might ask.... things like velocity, channel, HiHAT pads, kit names, gate time settings, and the list goes on and on.

GLOBAL EDIT FOOTSWITCH

This footswitch is for doing things that are.....Global. That means that these settings affect the entire instrument, and not just one kit.

The overall training of the pads, saving your kits, doing data dumps, memory protection are all examples of Global things to do on the trapKAT.

Like the other footswitches, you use this footswitch in conjunction with hitting a pad. While this footswitch is held down, tap on any pad. Its Global Function is then displayed. We will describe what these Global functions are in the GLOBAL EDITING section of the manual.

MIDI OUT JACKS

There are two MIDI OUT jacks on the trapKAT. They are identical and are there for convenience in case you are using more than one sound source for your sounds. Data goes OUT from this jack. Data

goes to both the internal sound card and to the external world through these jacks at the same time. You do not need a MIDI cable if you are using the trapKAT with the sounds built in. The cable connection is done inside the instrument.

MIDI IN JACK

Plug a MIDI cable into this port if you want to send a SYS EX Data Dump to the trapKAT or if you want an external controller or sequencer to access the internal sounds.

It is also possible to program the MIDI note number of a pad if you are in Note Edit and you send a note number externally to the trapKAT from an outside source. This is called AutoTrain.

HiHAT INPUT

This is where you connect your eHAT to the trapKAT. You must use a 1/4" mono cable. On the eHAT, make sure that you are plugging into the middle jack marked (HiHAT). Don't use the Chick jack on the eHAT. You don't want to send voltage to the trapKAT's HiHAT input. The chick jack is not designed to be used with the trapKAT, but for future products (the DITI).

At the factory, we TRAIN the trapKAT to work perfectly with the eHAT. If you are using another manufacturer's hat pedal, you will probably will need to TRAIN the pedal in order to get the best results. TRAINING the pedal will be discussed in the GLOBAL Section of the manual.

THE MANUAL

Controlling the trapKAT effectively really requires that you understand the functions that lie underneath the KIT EDIT and GLOBAL EDIT Screens. Understanding the basics of MIDI really is also necessary so that the concepts discussed do make sense. You will then be able to program your own kits that reflect your needs and requirements in playing the trapKAT.

There is however another way out... a sort of purgatory for the land of MIDI. We compiled a list of questions that musicians ask us over and over again on how to get around the trapKAT. Each of the questions asked will go over all of the steps necessary to solve the specific problem. The answer's will be abbreviated but, it will answer the question. It's a shortcut yes, but it will help you get around the instrument in a "need to know" basis.

After reading this section in the manual, there will be several other sections that will cover all of the screens and functions in the trapKAT. This will be the NOTE EDIT, KIT EDIT FUNCTIONS and GLOBAL EDIT FUNCTION sections. This will be followed by the Appendix that will have listings of Sounds, Definition of Terms, Warranty and other important information.

Please also note that there are other ways of learning about the trapKAT. There is a VIDEO HELP DESK on the alternatemode.com website that will have video demonstrations on "how to's". There is a KNOWLEDGE Database on the website that has answers to questions asked. There is a Forum where questions can be answered and finally (last resort), you can call us at 877-933-6237

20+ QUESTIONS MOST OFTEN ASKED

*HOW DO I.....OR..... WHY CAN'T I
OR..... WHY DO I.....ORWHAT IS???*

WHAT ARE THE PAD NUMBERS

There are 10 big pads and 14 rim pads. The first 4 big pads left to right are 1 to 4. The next circle of pads from the left are pads 5-10. The little rim pads in front of the instrument are numbers 11-14. The outer rim pads starting from the left are pad numbers 18-24

GET MY HiHAT TO WORK

In order to have a good working HiHAT pedal, you will need to do three things. First you must TRAIN your pedal. Then you must decide what pads you want to have the HiHAT function to work on (1 to 4) and finally you will need to determine which mode of HiHAT you want (GM HiHAT, Controller HiHAT or HATNOTE Modes).

To TRAIN the HiHAT pedal, Step on the Global Edit Footswitch. While held down, tap on rim pad # 17. The display will then guide you to depress the HiHAT pedal all of the way down and then hit any pad, followed by releasing the pedal and hitting any pad. Your pedal is now Trained!

Now you need to define what pad or pads are going to be HiHAT pads that will respond to the position of your HiHAT pedal. To do this, step on the KIT EDIT Footswitch. While held down, tap on pad # 5. The display will show what pads have been previously selected.. Now strike pad #5 again. The screen will ask you to select what pads you want to be HiHAT pads. Tap on the pad or pads that you want to be HiHAT pads. Once you've done that, simply release the pedal.

Finally you need to decide if you are using General MIDI HiHATs (if you are connecting to a GM drum machine), or if you are using Continuous Controller Data for Drum Modules or Soft Synths that looks at the pedal position or if you are using HATNOTE mode (designed for the Kurzweil Built in Engine).

Step on the KIT EDIT Footswitch. While held down, tap on pad # 18. Each time you tap on the pad, you will see choices to select. HATNOTE, 01, 04, 04F and None. HATNOTE is the setting to use if you are using the 5KS, "NONE" is the setting if you are using a General MIDI drum module, and 01, 04 and 04F are Continuous Controller Number Settings used in the popular VST drum modules or upscale drum modules like the Roland TD30.

There are other settings that can further tweak the HiHAT Settings in the Global Screen settings.

GET MY BASS DRUM PEDAL TO WORK

Like the HiHAT pedal, the bass drum trigger needs to be TRAINED to get the best results. The proper MIDI note number needs to be assigned and finally the right velocity setting in the Kit needs to be tailored to your taste.

There are three GAIN settings in the Global Setting called MIN, MED and MAX. There are also names of bass drum trigger pedals from the past. It is always best to start with the MIN Setting. If you find that you need more volume or dynamic range, you can always bump up to the next level. To set the Gain Setting, step on the Global Edit Footswitch. While held down, tap on pad # 18. Each time you tap on that pad, you will see the choices toggle between Min/ Med/ and Max.

Next you should TRAIN the pedal. Step on the Global Edit Footswitch, and while down, tap on pad #11. When you tap on the pad, the screen will ask you to choose you pad (or trigger) you want to TRAIN. Tap on your Bass Drum Pedal. The screen will ask you to play softly. Do it once and wait until it asks again to play hard. After you do that, you will need to tap on the Global Edit Footswitch again to get out of this mode. You can look at the values that the trapKAT set for your training in the Global Screens (pads 13 and 14). You can also lower the Threshold is you need softer triggering (Global pad 12). These are described in more detail in the Global Editing Section of the manual.

You now have to make sure that the bass drum is assigned to a bass drum sound. Usually this is MIDI note number 36. To change the MIDI Note Number, Step on the NOTE EDIT Footswitch and while held down, tap on the bass drum trigger. The MIDI note number is displayed. You can change it simply by tapping on the bass drum trigger with the Edit Footswitch held down.

The last thing to consider is the minimum velocity of the bass drum. Usually the minimum velocity needs to be raised some. Try using a value a 32 to begin with. To change the Minimum Velocity, Step on the KIT EDIT Footswitch and tap on pad # 12. The minimum velocity is displayed. You can change it by tapping on the pad.

GET THE TRAPKAT TO RESPOND TO MY PLAYING STYLE

One of the main features of the trapKAT (and the other KAT Controllers) is that you can teach the instrument your playing style. By performing a TRAIN on the pads, the trapKAT understands what you mean to be soft and loud. The MIDI velocity dynamics are superimposed within the dynamic range that you set. This is a very poweul feature as it makes your instrument personal!

Training the pads is easy. Step on the Global Edit Footswitch and Tap on Pad # 11 twice. You can then let go of the footswitch. Now, pad by pad, do as the screen asks.... play each pad soft, then hard. After you have done this to all of the pads and bass drum trigger, step on the Global Edit Footswitch again to get out of this mode.

You can see the results on your Training by using the Global Edit Footswitch and tapping on pads 13 and 14. These pads will show you the values the trapKAT “read” when you played soft and hard.

RESET THE TRAPKAT

Getting the trapKAT back to the original Factory Settings is easy. Step on the Global Edit Footswitch and while held down, tap on pad #15. It will ask you to tap on pad #15 again. Then just to be sure, it will ask you to hold down pad #1 then hit #15 a third time. When you do this, you will see the display acknowledge that the trapKAT has been reinitialized. The instrument defaults to the FACTORY Kits. If you are have the trapKAT 5KS, you will need to go the the USER Kits. The User Kits have 24 presets ready to go to get started with the 5KS.

After you reinitialize the trapKAT, the instrument automatically turns on MEMORY Protection. If you attempt to change any parameter on the trapKAT, you will hear a “bad” beep. To shut off MEMORY Protection, step on the Global Edit Footswitch, and while held down, tap on pad #3. This pad toggles the Memory Protection on and off.

GO BETWEEN FACTORY AND USER KITS

The FACTORY Kits on the trapKAT 5KS are meant to be used for GM Drum Modules. These Kits have not been optimized for the Kurzweil sound card. For the trapKAT with sounds, you should be using the USER KITS. Please note that you can make changes to Factory and User Kits, but you can only save USER Kit information. When you alter a Factory Kit, the changes go away as soon as you leave the kit. This is also true now for the User Kits unless you choose to do a SAVE function to that Kit.

Going between FACTORY and USER KITS is simple. Step on the Global Edit Footswitch and tap on pad #1. Each time you tap on that pad, the trapKAT switches between Factory and User Kits. When you shut off the trapKAT and turn it back on, it will remember what Bank of Kits you are using.

QUICK CLICK

Changing values on the trapKAT is usually performed by repeated taps on the same pad. Each tap increments the value by one. If you overshoot your desired value or if you want to decrement values and go in the reverse direction, a QUICK CLICK is the answer. While you are incrementing values, quickly release and repress the footswitch (within a second). The values will now change direction. This works for the Note Edit, Kit Edit and Global Edit Footswitches.

SAVE A KIT

Manual Kit Saving is new to the trapKAT 5KS. In all previous versions, the trapKAT automatically saved any changes that you made. We have changed this feature so that saving a Kit only happens when you deliberately want it to.

To Save a Kit, step on the Global Edit Footswitch, and while held down, tap on pad # 21. The display will ask to confirm that you want to Save. Hit the pad again and the current User Kit is saved.

CHANGE THE SOUNDS

When discussing changing sounds, we have to make a distinction between changing a sound on a pad, or changing the sound on a kit.

Changing a sound on a pad simply requires that you step on the NOTE EDIT footswitch, tap on the pad that you want the sound to change, then continue tapping to hear all of the sounds that are available in that kit. There are 127 note numbers that are possible in any Kit. When talking about melodic sounds, note number 00 is the lowest sound, and 127 is the highest note possible. If the sound is a marimba for example, each note number just plays a different note on the marimba. When talking about drum sounds, each note number usually plays a different sound. Usually there aren't 127 sounds available in a kit, but this is how the theory works.

For both pad sounds, and kit sounds, there is a MIDI channel that they play on. There are 16 MIDI channels available. This means that you can have different Kits sounds as well.

The way sounds are changed on a synthesizer is to send a Program Change Message to the synth. There are 127 program changes possible. But because modern synths have more than 127 sounds in their systems, Bank commands were created. A Bank is a collect of 127 different sounds (programs).

If you look at the Appendix and check out the Sounds built into the trapKAT, you will see a BANK Change number and a Program Change number associated with every sound. On the top of the list is the Bank Change Number. This is called the MSB, LSB number. There are two numbers associated with the Bank. On the Kurzweil, the MSB is always 00, and the LSB is a single number that represents each Bank of 127 Sounds. Going down that list is the Program Number and Sound Name.

On the trapKAT, you can store up to 4 different Bank and Program Numbers per kit. Recall that each of these sounds must be associated with a MIDI Channel number. This is the way that we can differentiate the different sounds on different pads when the sound is a kit sound, not a pad sound.. Also, we can control the relative Volume for each of these Sounds.

Yes this sounds confusing, but don't give up. Continue reading.....

The good news is that most of the time you will only be calling up one Bank and Program Number per User Kit. The even better news is that if you own a trapKAT 5KS, you don't even need to know about any of this. We created a short cut for you that allows you to get at all of the 256 drum presets built into the instrument without dealing with Banks and Program Numbers.

So lets start with the shortcut for trapKAT 5KS Users. We programmed User Kit number 24 with the shortcut stored in the Kit for demonstration purposes. Step on the KIT SELECT Footswitch, and while held down, tap on pad #24. Release the footswitch.

Now for the magic. Just tap on pads 23 or 24. Notice that the name of the kit changes. Pad 23 increments to the next kit and pad 24 decrements through the kits. You can check out all of the drum sounds this way. Notice also that besides the Kit Name, the display tells you what the Bank (LSB) and Program Number is. If you find a Kit that you want to Save permanently as a User Kit, step on the Global Edit Footswitch and hit pad #21 twice.

You can turn on this cool new feature on any User Kit by assigning this function to any pad. This function is turned on simply by assigning a special MIDI note number to the pad of your choice. Normally MIDI note numbers go from 00-127. The trapKAT has added note numbers to do special things such as PROGRAM ADVANCE and PROGRAM BACKUP. These are MIDI Note numbers 137 and 138. Step on the NOTE EDIT Footswitch and select the pad you want to assign this function. Now continue tapping on that pad until you reach to note number 137 or 138. Isn't that easier!

If you need to get to a sound that is not in Bank 4 or 5, (the drum banks) or if you don't own a 5KS, you will need to assign a MIDI Channel, Bank Number (MSB-LSB), Program Change Number and Volume Number to the Kit. If you need more than one sound, you can store up to 4 of these on different MIDI Channels.

It KIT EDIT, pads # 19 and 20 are assigned to this task. When you step on the KIT EDIT footswitch and continue tapping on pad 19, you will see Volume (1), Program (1), Channel (1) MSB (1) and LSB (1), then Volume (2), Program (2) etc etc all the way up to LSB (4)

When you see the value displayed, tap on pad #20 to increment the value. You can also QUICK CLICK the footswitch to go the other direction.

MANAGE KIT NAMES

If you own the trapKAT 5KS, you probably do not need to create your own KIT names. By using the Program Advance, and Program Backward functions in the User Kit, the name of the kit automatically loads in. (please read “Change the Sounds” above).

If you want to name your own Kit, you can. This is performed by stepping on the KIT EDIT footswitch and tapping on pad #21 twice. While continuing to hold down the footswitch, the pad numbers below change the characters on the display.

Pad 1 assigns upper case letters
Pad 11 assigns lower case letters
Pad 3 assigns a Space between characters
Pad 12 assigns a character
Pad 3 advances the cursor
Pad 13 reverses the cursor
Pad 4 advances the characters
Pad 14 reverses the characters.

Let go of the footswitch when you are done. You will be surprised just how fast you can name kits in no time.

CHANGING NOTE NUMBERS DOESN'T DO ANYTHING

The trapKAT can play up to 16 sounds on one pad. Most of the time when you are changing note numbers, you will be working on slot number 1 (of 16). If you accidentally stepped on the NOTE EDIT Footswitch and the KIT EDIT FOOTSWITCH at the same time and then struck a pad, you then switched editing to slot number 2 of 16. You can tell which slot you are working on by looking at the screen when the Note Edit Footswitch is held down. For example, you might see something like #38-01. The number 38 is the MIDI note number. The 01 represents slot 1 of 16.

Hearing these other sound slots depends on if you have a special function turned on such as Alternate Mode or Velocity Shift. These are activated in the Velocity Curve Screens. These functions will be described in the KIT EDIT FUNCTIONS chapter.

If you find that you are not in slot number 1, then step on both the NOTE EDIT and KIT EDIT footswitches at the same time, and continue tapping on the pad until slot 1 rotates back on the screen.

THE TRAPKAT IS PLAYING ITSELF

Every pad on the trapKAT has its own “THRESHOLD” setting. This is the low end (softest) sensitivity

setting where the trapKAT decides when to start sending out notes. If you ever hear any false triggering, fixing the problem is easy. First identify the hyper sensitive pad. If you don't know which pad it is, step on the NOTE EDIT Footswitch. It will just jump to that pad when the pad triggers itself.

Step on the Global Edit Footswitch, and while held down, tap on pad #12. The screen will ask you to hit the pad that you want to adjust. Hit that pad, then hit the pad again. Each time you strike the pad, it will raise the THRESHOLD by a value of one. If you want to go backwards, perform a “Quick-Click”

CONTROL INDIVIDUAL DRUM VOLUMES and EFFECTS

New screens have been added to the trapKAT 5KS to control the individual drum volumes in the Kurzweil sound card as well as the ability to control the reverb and EFX per kit. Step on the KIT EDIT footswitch and tap on pad #7. Each time you strike the pad, you will see the next parameter and its value. There are individual volume control settings for the bass, snare, toms, HiHAT, and miscellaneous sounds, as well as a general reverb and EFX setting. If the parameter is set to OFF, then the sounds default value is sent. If a value is added, then that value overrides the default setting. To change the default setting to a value of your liking, then tap on pad #8. Each strike on pad #8 increases the value of the parameter.

THE DIFFERENCE BETWEEN TRAINING AND VELOCITY SETTINGS

There is a difference between TRAINING your pads Globally and setting up your velocity settings in a particular KIT. When you go into the GLOBAL screens and elect to TRAIN a pad, you are setting up the playing range for those pads for the entire instrument. A TRAIN tells the trapKAT what you define as a soft and hard hit. Setting up a velocity range on the other hand tells the trapKAT how loud to play a pad when you play soft and hard. There is a range from 00 to 127. This is the velocity range. In every kit, you define what is the minimum velocity number you want when you play soft, and the maximum velocity when you play hard.

I DON'T HEAR ANY SOUNDS ON MY 5KS

If you don't hear any sounds in the headphone or audio out jacks, then first try raising the volume of the kit. Notice that there are two little buttons next to the headphone jack. This is the Master Volume control for both the headphones and audio outs.

Please note that if you turn off the trapKAT and back on again too quickly, the sound card may not boot up. Shut the trapKAT off and wait about 10 seconds before turning the trapKAT back on. If that doesn't work, then make sure that you have not assigned a Bank and Program number that does not exist in the sound list.

Finally, make sure that you are using the correct 15v power adaptor that came with the trapKAT 5KS. Current users of the malletKAT, drumKAT or original trapKAT can not use the power supply (9v) that was supplied with that controller.

I DON'T HEAR ANY SOUNDS ON MY SOUND SOURCE

When you don't hear any sounds coming from your sound source, it usually is because you haven't set the correct MIDI channel. There are 16 MIDI Channels possible. The trapKAT transmits on a MIDI

Channel, and the sound source receives on one. Check to see what MIDI channel you are transmitting on in the trapKAT. Then check your sound source to make sure that it is receiving on the same channel.

To see what MIDI channel you are transmitting on your trapKAT, step on the KIT EDIT Footswitch, and while held down, tap on pad 1. The MIDI channel will be displayed. You can change the channel by hitting pad one repeatedly. If you want to have different MIDI channels on different pads, tap on pad 11. The screen will ask what pad you want to see the MIDI Channel.

THERE IS A BIG DELAY WHEN I USE MY COMPUTER

When any MIDI controller is plugged into a computer for the purpose of sound generation, latency becomes an issue. What should be noted is that the delay heard is not coming from the trapKAT. The trapKAT sends out data in about 1mS. (that's 1000th of second). Sound generation from a computer can be 10 times that, and that can be very noticeable.

If you decide to use a computer for sound generation, consider getting the fastest computer you can afford with plenty of RAM. Today computers are sold with SSDs (solid state drives). These are much faster than traditional drives and they are truly road worthy.

The real culprit for latency is the sound card in the computer. It simply isn't fast enough for use as a musical instrument. Of course it's fine for playing back music, but not for real time generation of sound. To that end, manufacturer's have created external Audio/MIDI devices that use special drivers (ASIO for example) that are designed for using your computer as a sound source. Using an audio/midi interface is even more critical for drummers because we hear latency much better than other musicians.

Even when you get this device (there are many to choose from.. just type in AUDIO MIDI INTERACE in GOOGLE) , there are settings that are crucial for dealing with latency issues. In the preference screens on these devices you can control the Sample Rate and Buffer Rate. Raising the Sample Rate and Lowering the Buffer Rate assures the lowest latency, but it puts the most demand on your computer. Usually the preference screen also displays the latency in mS. You will need to find the balance between CPU usage and latency.

WHAT'S A GROOVE, CAN I MAKE MY OWN

There are Grooves built into the trapKAT, but it is a feature that comes from the past. Remember that the trapKAT was introduced back in 1995. It's intention was to have a groove ready to play when the trapKAT was sitting in the stores. These grooves were built to work in the GENERAL MIDI format. If you are plugged into a GM compatible sound source, the grooves will work fine, but they do not sound correct when you are using the Kurzweil sound card. Perhaps with enough requests for an upgrade, we will create new grooves to work especially for the Kurzweil. Unfortunately, the grooves are preset and new grooves can not be created by the user.

In the GLOBAL EDIT section, the operation of the grooves will be described.

GET RID OF THE BEEPER SOUND

Turning the Beeper On or Off is done by stepping on the Global Edit Footswitch, and while held down, tap on pad #19. The screen will display its current setting. To change it, tap on pad #20

BACK UP MY USER KITS

The trapKAT is a like a computer, and can be subject to data loss. Backing up your kits should be a routine process. There are free programs for both MAC and PC that you can use to back up your data using a MIDI Interface. There are links on our website to get them. It is also possible to use your sequencer to store data. This type of storage is called SYS EX DATA Dumping.

On the trapKAT there are three kinds of SYS EX Dumping. All Memory Data Dump, 1 Kit Data Dump and Global Dump. We recommend using the “All Memory” dump. Its the easiest and the best way to save all of your work. To perform a Data Dump, make sure that you plug a MIDI cable to the trapKAT's MIDI out jack, then connect that to your MIDI Interface. Open up one of the programs suggested on our website (SYSEX Librarian, MIDIOX, etc) and enable it to “RECIEVE” data.

On the trapKAT, step on and hold down the Global Edit Footswitch and hit pad # 10. All of the trapKAT's memory will be sent out the MIDI out jack.

The trapKAT will automatically receive data dumps back. Just plug a MIDI cable to the MIDI IN jack, and send the file over using the same program.

KIT EDIT FUNCTIONS

The following section will go over all of the KIT Edit Functions that are in the trapKAT. It is in these screens that all of the programming of the kits happen. Accessing these functions are always the same. Step on the KIT EDIT Footswitch, and while held down, tap on one of the pads. The pads function will display. Here is the list of functions.

Pad 1	Kit MIDI Channel
Pad 2	Kit Minimum Velocity
Pad 3	Kit Maximum Velocity
Pad 4	Kit Velocity Curve
Pad 5	Kit HiHAT Selectable
Pad 6	Kit Splash Note
Pad 7	Kurzweil Sound Control Listing
Pad 8	Kurzweil Sound Control Value Change
Pad 9	HiHAT Overlap
Pad 10	Kit Gate Time
Pad 11	Pad MIDI Channel
Pad 12	Pad Minimum Velocity
Pad 13	Pad Maximum Velocity
Pad 14	Pad Velocity Curve
Pad 15	Kit Copy “to” Kit
Pad 16	Perform Kit Copy
Pad 17	Foot Control Channel
Pad 18	HiHAT Continuous Control
Pad 19	Volume, Bank, Program Change Listings
Pad 20	Volume, Bank Program Change Value Change
Pad 21	Kit Name
Pad 22	All Notes Off
Pad 23	No Function/HiHAT Train Values/Pad Threshold Values
Pad 24	Pad Gate Time

In an attempt to make these functions more understandable, we have combined the pad functions into categories. This should make it easier to program the trapKAT as related functions described below have been organized in one topic.

MIDI CHANNEL Pad #1 and Pad #11

To change the MIDI Channel on the entire User Kit, tap on pad #1. The Kit's current MIDI channel is displayed. To change the MIDI channel, tap on the pad again or “quick click” to reverse direction when tapping on the pad.

If you want to change the MIDI Channel on just one pad, use pad #11, Pad MIDI Channel. When you tap on pad# 11, it will ask you to select the pad that you want to change the MIDI Channel.

There are 16 MIDI channels available in MIDI. Any pad can be assigned to it's own MIDI channel. If you have a multi-timbrel sound module, very creative kits can be created! A different program sound can be assigned to any MIDI channel, allowing the trapKAT to control many sounds at once.

KIT VELOCITY (Minimum, Maximum, Velocity Curves) Pad #2,12, 3,13, 4 and 14

There are three settings that affect the response of each pad. They are called Minimum and Maximum Velocity, and Velocity Curve. The Min and Max Velocity affect the range of how loud or soft an individual sound can be. The Velocity Curve affects the feel or how fast the sound gets louder as you smoothly play harder and harder.

The range for velocity is 00-127. If you set the Minimum to 00 and the Maximum to 127, you are programing the pad to play the widest dynamic range possible. Counter to what you may first think, this is not always the best choice. For example, most people find that the bass drum needs a narrower range, say 32-127. If the softest hits are not heard, then you will need to raise the Minimum Velocity Setting. If you want the same crack of a snare drum, you might want to raise the Minimum Velocity even higher. If you hear a sound that is not balanced, i.e. too loud, you might want to lower the Maximum Velocity.

After the range is set, the next factor to consider is the Velocity Curve. The curve tells the trapKAT how fast to change from soft to loud. Usually folks like a linear or smooth response, and use the default Curve #1. There are exponential and logarithmic curves that stay soft longer as you play harder or the other way around.

It is possible to set one Minimum, Maximum and Curve Setting for the entire kit. Use pad 2 for the Kit Minimum Velocity, pad 3 for the Kit Maximum Velocity. The range possible is 00-127. Use pad 4 to Select a Kit Curve. There are 8 “normal” curves to choose from and then there are “special curves” discussed below.

The normal curves are”

Velocity Curve 1	Linear-smooth from soft to loud
Velocity Curve 2	Stays soft longer than curve 1
Velocity Curve 3	Stays soft even longer than curve 2
Velocity Curve 4	Slow linear curve with an accent on the top end
Velocity Curve 5	High minimum, stays even then accent on top
Velocity Curve 6	moves from soft to loud much quicker than curve 1
Velocity Curve 7	another variation on the Linear Curve
Velocity Curve 8	and another variation of the Liner Curve

As you can see, these curves are very subjective. They will sound different depending on the sound, the velocity ranges set and the curve factor built into the sound module. It is for this reason we recommend that you stay with Curve 1 unless you want “more” or something different. Experiment.

If you decide that you want to have different velocity ranges and curves for different pads, the trapKAT allows you to do this. Pad # 12 controls individual pad minimum velocity. Pad # 13 controls individual maximum pad velocity. Pad # 14 controls individual pad velocity curve. When any of these pads are tapped, the trapKAT will ask what pad you want to change. Hit the desired pad and change the velocity or curve by continued strikes on that pad. If you change any pad, and go back to the Kit Velocity pads, you will see “various” on the screen, informing you that different pads have different velocity values. If you proceed to change the value here, all velocities within the kit will be reverted to this value.

FOOT CONTROL CURVES

There are 7 different foot control curves to choose from to personalize the feel of your HiHAT controller pedal. Choose the one that best suits your type of controller pedal.

Hold the Kit Edit footswitch down and also press down once on your controller pedal. Each subsequent press on the pedal toggles through the foot controller curves.

SPECIAL CURVES (MULTI MODE and ALTERNATE MODE) Pad 4 and 14

In the search to add drumKAT like features to the trapKAT, we developed a way of adding multi mode and alternate mode features to the trapKAT without the necessary programming needed on the drumKAT to do this. This was accomplished by adding special “canned” curves that performed these functions simply by calling up that function. These curves are located in Velocity Curve pads #4 (kit) and pads #14 (individual pad) settings. They appear after the “ 8 normal” curves.

To select a multi-pad or alternate mode curve, step on the Kit Edit footswitch and hit either pad 4 for the entire kit or pad 14 (recommended) to find the special curve function. These Special Curve Functions are:

2nd Note @ Hardest	sound 2 plays only for the hardest hits
2nd Note @ Hard	sound 2 plays only for hard hits
2nd Note @ Medium	sound 2 plays when medium hits are executed
2nd Note @ Soft	sound 2 plays when soft hits are executed
2 Note Layer	two sounds are played simultaneously.
Xfade @ Middle	crossfades of sounds 1 and 2 where they mix in the middle
Xswitch @ Middle	crossfades on sounds 1 and 2 where there is an exclusive switching from one to the other in the middle

1 @ Medium; 3 @ Hardest	sound 3 comes in only for the hardest hits. Sound 2 comes in for the medium hits
2 @ Medium; 3 @ Hard	sound 3 comes in only for the hard hits. Sound 2 comes in for the medium hits
2 Double 1; 3 @ MED	sound 3 comes in only for medium hits. Sound 2 doubles sound one all of the time
3 Note Layer	simultaneously plays sounds 1,2 and 3
4 Note Shift	sound 4 comes in for the hardest hits. Sound 3 for medium, sound 2 on the soft hits
4 Note Layer	simultaneously plays sounds 1, 2,3 and 4
Alternating	from 2 to 16 notes in an alternating pattern (more info below)
Control + 3 Notes	continuous data send from pad along with note data (more info below)

In order for these curves to work properly, note numbers have to be assigned to the NOTE NUMBER SLOTS. There are up to 16 slots per pad. These are assigned using the Note Edit Footswitch combined with the KIT Edit Footswitch.

Step on the Note Edit Footswitch and tap on a pad. You will see the pad number, a three digit note number already assigned to the pad followed by a dash ... then you will see the SLOT number from 1- 16

While the Note Edit Footswitch is held down, press on the Kit Edit Footswitch. Each press on the Kit Edit Footswitch increments the slot by one. When you release this footswitch, you can then edit the note number in that slot.

The trapKAT remembers what slot you last used, so be careful. You might be thinking you are programing the first slot, but check the slot number first before changing note numbers

ALTERNATE MODE

Alternating

The trapKAT can play up to 16 alternating notes on any pad. It is also possible to use “silence” as a note value so that rhythms can sound simply playing even 16th notes on that pad.

To turn to this function, select the Curve called, ALTERNATING for that particular pad. Next program the MIDI note numbers you want in the Slot positions.

There are several “special” note numbers that have a direct affect on the Alternating Curve. These are called “Alternate Reset”, “Alternate Freeze” and NO. These “note numbers” can be found when you

scroll past 127 using the Note Edit Footswitch.

If “Alternate Reset” is assigned to a slot (other than slot #1), then the alternating pattern will then start again from the beginning. This feature allows the pad to be set to any alternating pattern from 2 notes to 16 notes.

If “Alternate Reset” is assigned to a slot #1, then the Alternate Resets affect ALL Alternating pad in the entire User Kit.

The “Alternate Freeze” function stops the alternating pattern from advancing to the next note slot. If the Alternate Freeze is placed in the first position (slot #1) in the Alternating, then ALL alternate notes in the entire kit will be frozen.

If the Alternate Freeze function is placed in any of the other remaining 15 MIDI note number slots, then that pad will stop advancing until the pad is reset. (Alternate Reset)

If “no” is assigned to a slot, then a silent note will take the place of a MIDI note number

CONTINUOUS DATA Control + 3 Notes mode

Any pad can be assigned to send out continuous control data on a pad. The MIDI note number assignment becomes the CC# number and the velocity of the hit becomes the CC value. Minimum and Maximum CC ranges are assigned by the velocity minimum and maximum settings of that pad.

The same pad assigned to “Ctrl + 3” can also simultaneously send out up to 3 MIDI notes per pad. These are assigned in slots 2, 3 and 4. Any MIDI note assignments in the other slots (5-16) will have no effect.

When the pad is played, the velocity information (how hard you hit) is converted to the Controller value. The softest hit will send out a CC value of 0, while the hardest hit will send out a CC value of 127. The outer boundaries are controlled by the minimum and maximum velocity settings that you set for the pad.

The Gate Time for the pad serves as a SLEW. This means how long it takes to go from value to value. It is like a portamento for controller values.

To use this function, set the Curve on the desired pad to “Ctrl + 3 Notes”. The MIDI note assignment for slot #1 then becomes the Continuous Controller Number. How hard you hit the pad then becomes the Control Data number (00-127) in real time. How fast the value goes from number to number is determined by the Gate Time.

Finally Slots 2, 3 and 4 can be assigned to MIDI notes. These notes will be played simultaneously , that is layered along with the control data information.

HiHAT CONTROL

Pad #5,6,9,17 and 18

Getting responsive HiHAT control is a very important of your kit setup. Depending on your sound source and HiHAT pedal, different settings and parameters are possible.

Here are some different ways that the HiHAT is tackled in Electric Drums

General MIDI HiHAT- Notes are assigned to open, closed, chic and splash. There are no variations of open and closed. Pads on the trapKAT are assigned to perform this function (HiHAT Pads)

Continuous Control- For these sound modules, only one note number on the pad is required to get at all of the positions on the HiHAT. On the trapKAT, HiHAT pedal position is recorded and sent out via continuous controller messages. The HiHAT pad assignments do not need to be activated.

HATNOTE- On the trapKAT 5KS, different HiHAT note numbers are sent out depending on the position of the HiHAT pedal.

Before determining which method is right for you, please make sure that you TRAIN your HiHAT pedal. (Global Kit Footswitch pad#17).

Also make sure that the Foot Controller is set to the same MIDI channel as the rest of the KIT. This is found in Kit Edit, pad # 17. This pad normally defaults to “SAME AS CHICK” in which case you do not have to do anything.

SELECTING PADS to be HiHAT PADS

When a HiHAT pad is played, the note that is sent out depends on whether the HiHAT pedal is depressed or not. If the HiHAT pedal is depressed, a “closed” note will be played. If the HiHAT pedal is not depressed, an “open” note will be played. The trapKAT needs to know which pads should be controlled by your HiHAT pedal position.

To select a pad or pads to be a HiHAT pad, press on the Kit Edit Footswitch, and while held down, hit **pad #5**. You will see the pad numbers that are currently selected for HiHAT.

If you strike the pad a second time, the pad numbers go blank, and the screen asks you to Select what pads you want to be the HiHAT pad. You can now tap one, two three or four different pads that all will be assigned to the HiHAT Mode. Release the footswitch.

DEFINING SETTINGS FOR OPEN CLOSED and CHICK

To define the MIDI note number for the **Open** Sound, step on the Note Edit Footswitch and tap on one of the HiHAT pads. Do not press on the pedal. Every tap on the HiHAT pad increments the midi note by one. You can do a “quick click” to reverse direction. The GM note for Open Sound is MIDI note #46.

To define the MIDI note number for the **Closed** sound, step on BOTH the Note Edit Footswitch and depress the HiHAT pedal. While both are held down,tap on one of the HiHAT pads. Every tap on the

HiHAT pad increments the midi note by one. You can do a “quick click” to reverse direction. The GM note for Closed Sound is MIDI note #42.

To define the MIDI note number for the **Chick** sound, step on and keep down the Note Edit Footswitch and then tap on the HiHAT pedal. Every tap on the HiHAT pedal increments the midi note by one. You can do a “quick click” to reverse direction. The GM note for Closed Sound is MIDI note #42.

To define the MIDI note number for the **Splash** sound, step on the Kit Edit Footswitch and while held down, tap on **pad #6**. Each subsequent tap on the pad will increment the note number. Usually the open sound MIDI note number #46 is used for the Splash.

Please note that the min/max velocity settings, curve and gate time settings are all programmed in the normal way and that these settings affect all of the notes in the HiHAT.

CONTINUOUS HiHAT CONTROL

Most of the new drum machines on the market today use continuous controller information to create various amounts of open and closed HiHAT. This permits your HiHAT pads to not just be open or closed, but to play sounds that vary continuously from open to closed. As you move your eHAT or other CC controlled HiHAT pedal, the trapKAT sends a stream of information to the sound source about the changing position on the HiHAT pedal. This in conjunction with hits on the HiHAT pads, give you varying HiHAT sounds.

Step on the Kit Edit footswitch, and tap on pad **#18**. This is your HiHAT Continuous Control Screen. Manufacturers of drum modules use different Controller Numbers for controlling HiHATs.

The most popular is CC 4. On the trapKAT, we offer CC#01, CC#04 and CC#04F.

In the early models of drum modules, some manufacturers did not use the full range of CC control. There were two versions of CC4. One went from 0-64 and the other went from 0-127. On the trapKAT, CC4 setting represented the limited range, and CC4F (full) represented the full range. Today everyone that uses CC control uses the CC#04F version.

It is also possible not to send out CC data on the trapKAT. Just scroll to the value of “NONE” on pad #18.

HATNOTE and HATNOTE OVERLAP

You may have noticed another choice on pad #18 called HATNOTE.

HATNOTE offers an 8 note hi hat feature to users with a HiHAT controller like the eHAT, and a sound module that uses multiple sounds for the HiHAT. This is what the trapKAT 5KS uses for the Kurzweil sounds built in. Varying degrees of HiHAT open sounds appear when you strike a HiHAT pad and have set the Continuous Controller function to HATNOTE. There is no need to program the note numbers for this mode. These values are “fixed” and preprogrammed to work automatically.

HATNOTE OVERLAP

Hit pad **#9** while holding down the Kit Edit Footswitch and you will see the HATNOTE Overlap

screen. This screen allows you to set a specified time in which your HiHAT notes will overlap instead of abruptly cutting each other off. This will create a more realistic sound. The Overlap times are the same as the Gate Time Settings (.005-6.3, Roll Mode, Infinite)

COPY KITS Pad # 15 and 16

It is possible to copy a preset Factory Kit or a User Kit to any of the 24 User Kit locations. “Kit Copy” will always copy the KIT you are currently in to some other selected USER Kit. Kit Copy is performed using pads # 15 and #16, when the Kit Edit footswitch is depressed.

When pad #15 is struck, the screen will display “Copy Current Kit to User Kit XX”. While the footswitch is still held down, hit pad #15 repeatedly. You will see the User Kit value increment with each hit of the pad. When you reach the User Kit location where you want to store this current kit, Hit pad #16. The screen will ask you to verify that you want to do this. Hit pad #16 again to Store the Kit.

So remember, pad #15 Changes the Kit Number and Pad 16 performs the copy function

SOUND CONTROL (Volume, Bank, Program Change) Pad # 19 and 20

The trapKAT KS can send out 4 different Bank Changes, Program Changes and Volume Changes on 4 different MIDI channels. With the KIT Edit footswitch held down, tap on pad #19 (left of the display). This is a “tunnel” screen, meaning that each time you tap on pad #19, a new screen pops up. These are the Screens in the Tunnel. Here are the screens in the Tunnel

Volume 1 = xxx
Program Change 1 =xxx
Program Change Channel 1 = xxx
Bank (MSB1) = xxx
BANK (LSB1) = xxx

Volume 2 = xxx
Program Change 2 =xxx
Program Change Channel 2 = xxx
Bank (MSB2) = xxx
BANK (LSB2) = xxx

Volume 3 = xxx
Program Change 3 =xxx
Program Change Channel 3 = xxx
Bank (MSB3) = xxx
BANK (LSB3) = xxx

Volume 4 = xxx
Program Change 4 =xxx
Program Change Channel 4 = xxx
Bank (MSB4) = xxx
BANK (LSB4) = xxx

Usually, you only need to send out the first group, that is a Volume, Program, and Bank Change commands on one MIDI channel.

If you have a trapKAT KS, you can look at the SOUND LIST in the Appendix Settings. On the top of every list, is the BANK NUMBER, which is called up by using two sets of numbers (MSB,LSB)

A Bank is a collection of up to 127 Sounds (program changes)

In order to call up a sound on a Kit, the Bank, Program and Volume numbers on a MIDI channel must be sent in order for the sound to change.

Pad #20 changes the values on all of these parameters. Each tap on pad 20 increments the value of the number displayed. If you quickly release the Edit Footswitch and press down on it again quickly, (quick-click), you can change the direction of values, decrementing instead of incrementing.

Most sound modules have a listing in the back of their manual with all of the sounds available. These sounds will require its own MSB,LSB Bank Change and Program Change and Volume Change Commands.

Please note that some sound modules (Kurzweil is one of them), require these parameters to be sent out as one packet. That means that as you change one parameter at a time,you will not hear the sound change until after you Save the Kit, leave the kit, then return to it.

If you have the trapKAT KS (with sounds) and are using the “Program Advance /Backwards” special note numbers to scroll through the drum kits, the sound change is immediate. The trapKAT sends out the packet automatically.

KURZWEIL SOUND CONTROL Pad # 7 and 8

New screens have been added to the trapKAT 5KS to control the individual drum volumes in the Kurzweil sound card as well as the ability to control the reverb and efx per kit. Step on the KIT EDIT FOOTSWITCH and tap on pad #7. Each time you strike the pad, you will see the parameter and a value. There are individual volume control settings for the bass, snare, toms, HiHAT, and miscellaneous sounds, as well as a general reverb and efx setting. If the parameter is set to OFF, then the sounds default value is sent. If a value is added, then that value overrides the default setting. To change the default setting to a value of your liking, then tap on pad #8. Each strike on pad #8 increases the value of the parameter.

Below are the screens in the “tunnel” on pad #7. Each time you tap on pad #7 with the Edit Footswitch

held down, the display rotates through the screens. The default value is NO. This doesn't mean that there is no effect or volume, it means that the trapKAT (the user) is not overriding the settings of the volumes, reverb and EFX that was preset at the factory. The value range goes from 00-127

Filter	Putting a value here other than NO adds a Filter effect to the entire kit.
Pitch	Changes the pitch of the entire kit up or down
Kick Vol	Raises or lowers the kick drum sounds
Snare Vol	Raises or lowers the snare drum sounds
Tom Vol	Raises or lowers the tom sounds
HiHAT Vol	Raises or lowers the HiHAT sounds
Misc Vol	Raises or lowers the rest of the sounds
FX	affects the amount of the effects channel (usually chorus or delay)
Reverb	affects the amount of reverb

KIT NAMING

Pad #21

It is possible to assign a name to your User Kits, using up to 12 letters. Hit pad #21 twice while holding down the Kit Edit footswitch.

To change the character of the letter that's flashing, use the following pads

Pad 1	assigns upper case letters
Pad 11	assigns lower case letters
Pad 2	assigns a Space between characters
Pad 12	assigns a character
Pad 3	advances the cursor
Pad 13	reverses the cursor
Pad 4	advances the characters
Pad 14	reverses the characters

New to the trapKAT 5KS (with the Kurzweil Sound Engine) is the auto loading of kits and their names when using the "special note numbers" called Program Advance and Program Backwards. When pads are tapped with their notes assigned to these "numbers", a new drum kit and their name is automatically loaded into the kit. This is the fastest way to Kit Name. If you want to use this kit permanently, all you have to do is Save the Kit in the Global Screen pad # 21

ALL NOTES OFF

Pad # 22

If a note ever get's stuck on (does not shut off), the trapKAT can send a ALL NOTES OFF command that will shut off all notes. Simply Step on the Kit Edit Footswitch and hit pad #22 twice.

PAD GATE TIME

Pad #24, #10

Gate Time is the length of the sound. It is the time between a MIDI Note On and the corresponding MIDI Note Off. On many drum machines, Gate Time has no effect. Many drum machines ignore MIDI Gate Time and simply play the sound to its completion. However the Kurzweil Sound Card built into the trapKAT and most keyboard synthesizers need a Gate Time value to match the length of the sound you want played.

Pad#24 and pad#10 are the Gate Time Pads in Kit Edit. As in previous KIT settings (channel, velocity, etc) it is possible to have a KIT Gate Time (same gate for entire Kit) pad # 24 or an individual pad time setting for each pad (pad # 10). Simply hold down the Kit Edit footswitch, tap on one of these pads, and continue to hit the pad until you arrive at the value you want. You can also “quick click” to reverse direction on the values when tapping.

Gate Times are expressed in milliseconds from .005 to 6.3 seconds.

There are three special Gate Time Settings also possible.

ROLL MODE

Roll Mode was designed to be used with sound modules and samplers that respond to note off commands. This feature helps to eliminate the “machine gun” drum roll effect by delaying a note off command until after 6 seconds has elapsed from the time the pad was last hit. ROLL MODE is a selection after the millisecond options (past 6.3 seconds)

INFINITE MODE

When a pad's gate time is set to INFINITE, it means that no note offs are sent on the pad. Just note on events.

LATCH MODE

LATCH MODE is a Gate Mode setting that toggles between note on and note off with repeated hits. This is an extremely effective mode when you want to control loops.

HIDDEN FUNCTIONS Pad #23

HiHAT TRAIN RESULTS

IDLE LEVELS

The first time that you strike pad# 23 with the Kit Edit footswitch held down, you will see the display say NO FUNCTION. But if you strike it again, you will see a peculiar screen looking something like this

OPEN 038 091 174 218 247 CLOSED

This is the **HiHAT TRAIN RESULTS** Page

The values shown above are numbers that the trapKAT loads into this screen when you TRAIN your HiHAT pedal. The trapKAT breaks down movement of your pedal into 5 malleable zones.

This advanced screen is useful to make sure that your pedal is working properly. You can also manually tweak these values.

Pad # 1 tweaks the first value
Pad #2 tweaks the second value
Pad #3 tweaks the third value
Pad #4 tweaks the fourth value
Pad #10 tweaks the fifth value

IDLE LEVEL SCREEN

If you Step on the Kit Edit Footswitch and tap on pad #23 three times you will be entering the Idle Level Screen. Release the footswitch after you hit the pad three times and you will see something like this

```
R0001001001 0100  
P00110000
```

This screen shows you the “idle level” of all 24 of your pads. This idle level is a measure of what the internal computer sees from your pads when you are not playing – when they are “idle”. The sensors in the trapKAT are called FSR (force sensing resistor). These sensors are sensitive to very light playing or pressure. Therefore, even the pressure of the nuBounce playing surface can show up. That is OK. The software is designed to take care of small constant pressures. This is what we call the “idle levels” of your pads.

Looking at these numbers, the top row displays the values of all 14 rim pads. The first 10 numbers are pads #15 to #24. The next four values of the top line are the 4 rim pads in front of you, pad #11-14. The bottom line has pads 1 through 10. To identify which pad is which, pick a pad and press on it and watch which number on the screen rises when you press on it. It is normal for there to be some jitter or fluctuation in the numbers around some specific value. This is the scanning process.

If the numbers go beyond 4 or 5 on a new trapKAT XL or KS, then it means that there is pressure due to pad shift. Pad shift can occur if the pad gets real hot from the sun playing outdoors, and the glue material (PSA) underneath softens and the pad shifts (you move it vertically). This information informs us that maintenance is required on the pads. If you see consistent high numbers, you should contact us at the factory.

REMEMBER TO SAVE YOUR KITS!!!!

New to the trapKAT 5KS, User Kits must now be saved manually. The auto saving of the User kits have been removed so that the Program Advance/Backwards Functions can change sounds to a kit without permanently affecting the kit.

Saving a Kit is real easy. Step on the Global Edit Footswitch and tap on pad # 21 twice. That's it. Your current User Kit is now saved to Permanent Memory.

GLOBAL EDIT FUNCTIONS

The following section will go over all of the GLOBAL Edit Functions that are in the trapKAT. It is in these screens that you program the parameters that effect the entire instrument. Accessing these functions are always the same. Step on the GLOBAL EDIT Footswitch, and while held down, tap on one of the pads. The pads function will display. Here is the list of functions.

Pad 1	User/Factory Kits
Pad 2	Groove Enable/Disable
Pad 3	Memory Protect
Pad 4	MIDI Merge On/Off
Pad 5	Grooves Auto On/Off
Pad 6	Splash Adjust
Pad 7	Receive Program Change Enable/Disable
Pad 8	Cymbal Choking
Pad 9	Groove Volume
Pad 10	All Memory Data Dump
Pad 11	Individual PAD TRAINING
Pad 12	Individual Pad Threshold
Pad 13	Individual Low Dynamic
Pad 14	Individual High Dynamic
Pad 15	Reinitialize
Pad 16	General MIDI Names On/Off
Pad 17	TRAIN HiHAT Pedal
Pad 18	Bass Trigger Gain
Pad 19	Display Angle / Beeper Listing
Pad 20	Display Angle / Beeper Value Change
Pad 21	Save User Kit
Pad 22	No Function
Pad 23	Global Data Dump
Pad 24	Current Kit Data Dump

USER/ FACTORY KITS

PAD#1

The trapKAT has two banks of KITS. These are called Factory Kits and User Kits. There are 24 Kits in a BANK. The Factory Kits are designed to work with a General MIDI drum module or drum machine. The User Kits on the trapKAT 5KS are designed to work with the new Kurzweil Sound Engine built into the trapKAT.

You can change settings in the Factory Kit, but your changes are not saved. When you leave the kit, the original Factory Kit is restored. If you edit a Factory Kit and want to Save it, you must use the Kit Edit footswitch and pad #15-16 to save your Kit to a User Kit.

A User Kit is a collection of your pad note numbers, MIDI channels, velocity and curve settings, gate times and Kit Name. The User Kits in the trapKAT can be altered and saved by you. It is a starting

point. If you need to restore the Kits back to the Factory Setting, you will need to reinitialize the instrument.

Calling up a Factory Bank or User Bank is easy. Step on and hold down the Global Edit Footswitch, and hit pad#1. Striking the pad again toggles between the two Banks.

GROOVE ENABLE

PAD #2,5,9,15,16,23, and 24

The Melodic and Percussion Grooves built into the trapKAT are from the original 1.0 software created back in 1995! They were designed to work with General MIDI drum modules, so the new Kurzweil Sound card plays back music but not what was originally intended. It is likely that future upgrades of the trapKAT 5KS will rewrite these grooves.

The Grooves in the instrument were conceived as a selling tool when the trapKAT was demoed in the stores. The idea was that if the drummer started playing, they would forget what the trapKAT looked like and would just start playing and have fun. But because the user can not add their own grooves or modify the existing groove other than the tempo, these grooves got old in a real hurry.

By Default, the Grooves are now disabled on the trapKAT. To turn them on, step on and hold down the Global Edit Footswitch and hit pad #2. You can now toggle the Grooves on or off.

When the Grooves are Enabled, pads 15, 16, 23 and 24 stop functioning as normal drum sounds and act as a Groove Controller, changing grooves, starting and stopping them and controlling their tempos.

Pad 15 are Melodic Grooves, music minus drums. Each strike of the pad changes the Groove.

Pad 16 are Percussion Grooves. Each strike of the pad changes the Groove

Pad 24 is a Start/ Stop Pad

Pad 23 is a Tempo Control Pad. Hit the pad twice at the tempo you want (in quarter notes)

Pad 9 controls the Volume of the Grooves. The volume goes from 0-10

Pad #5 Globally Turns on or off the Groove

MEMORY PROTECT

Pad #3

If Memory Protect is Turned ON, you can not save any Kits or make any changes to the Kits. You will know that the Memory Protection is On because you hear a “bad” beep every time to try to change anything. If you perform a REINITIALIZE, the trapKAT defaults to MEMORY PROTECTION ON.

Turning Memory Protect on or off is performed on pad #3 with the Global Edit Footswitch held down.

MIDI MERGE

Pad #4

MIDI information coming into the MIDI In of your trapKAT may be passed (or merged) through to the MIDI Outs if the MERGE is ON. If you have another controller besides your trapKAT, you may want to have both the external controller and the trapKAT use the same sound source. The Merge setting allows you to do that.

If you are editing note numbers on the trapKAT, you can AutoLoad the MIDI note number and MIDI channel directly from the MIDI IN.

Turning On or OFF the Merge is performed simply by depressing the Global Edit footswitch and hitting pad 4 twice.

If you are in Note Edit Mode and you press a key on an external keyboard plugged into the MIDI IN port with MERGE On, that note and channel will automatically be loaded into the pad's note number.

SPLASH ADJUST

Pad #6

Splash is a HiHAT event that drummers use when they kick up the HiHAT pedal fast to get a splash sound.

This function controls the “EASE” of when splash occurs. There are 10 variations of “ease”, plus off.

Adjusting the “ease of splash” is performed by hitting pad #6 with the Global Edit footswitch depressed.

PROGRAM CHANGE RECEIVE ENABLE/DISABLE

Pad# 7

You can have the trapKAT change Kits under the control of some external device like another controller or sequencer. To do this you must select a MIDI Channel to Receive Program Changes on. This Channel must match the MIDI Channel that the external device is sending Program Changes to the trapKAT on. This setting can be on any MIDI channel 01-16 or set to OFF

To select the Channel to Receive Program changes on, simply depress the Global Edit footswitch and hit pad #7.

CYMBAL CHOCKING

Pad #8

Some drum modules use “aftertouch” to control choking a cymbal performed by grabbing the pad in the same manner you would grab an acoustic cymbal to choke it. Try it! Enable Cymbal Choking under pad #8 in Global Edit and see if your drum module responds to this.

There is another cymbal choking method that was implemented by Alesis™ called Exclusive 96 Mode. Note number 96 is essentially a silence pad and is another method you should try on your drum module if you are looking to choke your cymbal.

GROOVE VOLUME

Pad #9

This function controls the overall volume of Grooves if that are enabled. Choices are 0-10

MEMORY DATA DUMPS

Pad 10, 23,24

Data Dumps are used to send out your trapKAT RAM settings to be saved on an external storage device like a data disk or computer so that you may receive them later. On our website, we have links for

programs for your MAC (SysEx Librarian) or PC (MIDI/OX) that store data dumps on your PC.

Data dumps are used as a backup against the accidental loss of your User Kits and Global settings. Having a Data Dump of your Kits is like having a spare tire in your car trunk. It is not necessary until you need it, but when you need it, you'll regret not having been prepared.

The trapKAT sends out 3 different kinds of Data Dumps.

Pad #10 Sends out an ALL MEMORY DUMP. All Kit and Global Data is sent out.

Pad # 23 sends out only the GLOBAL Data. This is your training settings

Pad # 24 sends out the current KIT.

Step on the Global Edit footswitch and tap one of these pads twice. The appropriate data will be sent out. Make sure that you have a MIDI cable plugged into the MIDI OUT port on the trapKAT, and that you have the MIDI cable plugged into your receiving device, enabled and waiting to receive the data. Don't forget to Name the dump once its completed.

The trapKAT will automatically receive the Dump and notify you when the SYS EX is complete.

PAD TRAINING

Pads # 11,12,13,14

TRAINING

Everyone's playing style is different from everyone else's. Some players play with a much lighter touch than others. Because of this, the trapKAT allows you to "train" your own personal dynamics. Dynamics are your range between hard and soft hits. As well as training your dynamics, you can also adjust the sensitivity of your playing pads to suit your style.

TRAINING your pads consists of telling the trapKAT what a soft hit and a hard hit are in your playing style. If you are a finesse player, your hard hit may only be a medium hit for a basher. One set of settings aren't appropriate for both playing styles because when you play through your personal dynamic range from soft to hard, you need to get a full range of volume out of the sounds you are playing-not just soft to medium loudness.

To train the trapKAT for your playing dynamics, do the following

Depress the Global Edit footswitch and hit pad #11. The screen will ask you to hit pad #11 again. Now choose a pad that you want to Train and hit the pad softly.....wait until the trapKAT asks you to hit the pad hard. That pad is now Trained.

You can now TRAIN every pad and the bass drum pedal. Just keep on going from pad to pad, wait for the screen to tell you to hit the pad soft and then hard. When you are finally finished Training, step on the Edit footswitch again. The trapKAT will stay in TRAIN mode until you step on the Edit Footswitch.

The pads and rim pads all need to be trained individually because of their varied locations, uses, and heights. Retrain any pad that doesn't respond the way you like. Feel free to experiment with your training, using different levels of soft and hard hits. This training, together with the velocity and curve settings (that are in the User Kits), you can tailor the response of the trapKAT to feel natural and dynamic to your playing style.

PAD THRESHOLD

PAD # 12

The TRAINING does not affect the low end sensitivity, that is the level of softness that the trapKAT will “see”. This softest level is called a pad's threshold. The Threshold is the setting that affects how sensitive your pads are. The lower the value, the more sensitive that particular pad will be. However, if you make the Threshold too low, the pad may trigger itself, and you will hear “note chatter”.

Please note again, that the Minimum, Maximum and Curve Velocity Settings in the User Kits on every pad will influence the response of a pad. So if the pad sound is too soft for example, you might want to raise the pads minimum velocity. Please refer to the Velocity Setting Section in the Kit Edit Screens for details on programming velocities on the trapKAT.

Depress the Global Edit footswitch and hit pad# 12. It will ask you to hit the pad again. Now choose the pad that you want to change the Threshold.

If you strike that pad again, you will increment the threshold, making it LESS sensitive. To decrement while editing, do a “quick-click”, that is release the footswitch and quickly re-depress it. The beeping when you hit a pad will change to indicate that you are now decrementing, decreasing the values. A second “quick click” will return to normal incrementing.

If you strike any other pad (remember to keep the footswitch held down) you will see the value of its Threshold and be able to change the pads value as well. It is normal for you pads to have different values so only change those you want to make more or less sensitive.

PAD LOW AND HIGH DYNAMICS

PADS #13, 14

The training of your pads determines two values: your “low dynamic” and your “high dynamic”. These settings tell you where your soft and hard hits lie in the trapKAT's range. As well as training with the soft and hard hits, you can also manually changes these values yourself.

To see the values that the trapKAT stored after a TRAIN or to modify these values, step on the Global Edit footswitch and hit pad# 13 for LOW DYNAMICS, or pad # 14 for HIGH DYNAMICS. It the pad again to see the values.

If you strike that pad again, you will increment the Dynamic. If you “quick click”, striking the pad again reverses the values.

Hits that are softer than your Low Dynamic setting will play at your minimum velocity setting. Hits that are harder than your high dynamic will still play at your Maximum Velocity Setting. This is an important concept. It means that the TRAIN determines the RANGE that the trapKAT will see. If you play softer than what you trained at, the trapKAT still sends out the value that you set up in the Minimum velocity setting. If you play harder than the TRAIN, any volume playing beyond that will still only play the maximum velocity.

In other words, you want to put your Min/Max Velocity Range WITHIN your Training settings. What this means in practicality is that when you TRAIN, be realistic. When it asks you to play soft in the TRAINING process, play the way you play....hit the softest hit that you really will play. When it asks

you to play hard..... don't just bash it. Think about what level of hard playing you want the trapKAT to go to reach its maximum velocity setting. This is one place where you might need to experiment to get the trapKAT to respond the way you want it to!

REINITIALIZE

PAD #15

To Reinitialize your trapKAT back to all the original FACTORY and USER Kit settings, simply hold down the Global Edit footswitch, and hit pad #15. The trapKAT will ask you to hit pad #15 again, while your pressing pad #1.

If you then hit pad #15 again, while holding down pad #1, and while still depressing the Global Edit footswitch, the trapKAT will return to the original settings for everything. User Kits, Pad Thresholds and Preferences.

If you have a trapKAT 5KS, then you will need to go back to User Kits. But before you do that you must shut off Memory Protect.

So, if you have a trapKAT 5KS and you reinitialize the trapKAT...

- 1) Step on the Global Edit Footswitch held down and hit pad #3 to shut off Memory Protect.
- 2) Step on the Global Edit Footswitch held down again, but now hit pad #1 to get to User Kits

GENERAL MIDI NAMES

PAD #16

When setting up your MIDI note numbers on your pads, you can also choose to display the General MIDI Name of that note number. This feature only works if you are using a GM drum module. The Kurzweil Sound engine built into the trapKAT has an enhanced GM sound set. This means that the basic sounds are still assigned to the GM locations, but there are many other sounds that are not GM that are used in the sound card. This is a good thing because there is more variation of sound available on the trapKAT 5KS

Step on the Global Edit footswitch, and while held down, tap on pad #16. The GM Mode toggles between on and off with multiple hits.

TRAIN HiHAT Pedal

PAD #17

It really is important to TRAIN your HiHAT pedal in order to get the best results out of the pedal. Make sure that you are using a 1/4" mono jack plugged into the trapKAT. Step on the Global Edit Footswitch and tap on pad #17 twice.

The screen will ask you to depress the HiHAT pedal all of the way down and then hit any pad. Next, the screen will ask you to release the HiHAT pedal then hit any pad.

BASS DRUM TRIGGER GAIN

PAD #18

The BASS Drum input can be TRAINED, and the THRESHOLD and DYNAMICS can be changed in the same way as for the pads. Simply play the bass drum pedal instead of hitting a pad when TRAINING.

There is one important difference with the Bass Drum Trigger than with the pads. It has a GLOBAL GAIN Setting to help accommodate the variety of bass drum triggers available. Simply hit rim pad #18 with the Global Edit footswitch depressed and you can cycle through the three Gain Settings with repeated hits.

MIN (best for eKIC), MID (triggers that need more Gain) MAX (triggers needing high GAIN). If after the training the bass input, the response of your bass trigger is not optimum, then try a new Gain, then Train again. You can look at the Training Values (pad#13,14) to see the results of the GAIN change.

DISPLAY ANGLE/ BEEPER

PAD #19,20

On the trapKAT can change the viewing angle of the display and you can turn the Beeper on or off. When you tap on pad #19 in Global Edit, the screen toggles between the Display Setting and the Beeper Setting with each hit. To change the angle or the beeper setting, tap on pad #20

SAVE USER KIT

PAD #21

New to the trapKAT 5KS is the SAVE USER KIT function. In the past, the trapKAT automatically saved kits. Now after editing your User Kit, you will need to step on the Global Edit footswitch, and while held down, tap on pad 21 twice. Your current User Kit will be stored into permanent memory.

PAD LINKING

It is possible to LINK and pad to any pad. This means that when a pad is LINKED, striking one pad will play the notes from two pads. The pad that you are playing on, PLUS the pad that is linked to that pad.

To turn on the Link Pad Function,

Step on the NOTE EDIT FOOTSWITCH and tap on the pad that you want to set up the LINK. Now with the NOTE EDIT FOOTSWITCH still held down, tap on the GLOBAL EDIT FOOTSWITCH. Each time you tap on the GLOBAL Footswitch, the LINK Advances to the next pad. The choices go from pad 1 to 24 and NO.

When you assign a pad to LINK, both the pad that you are playing on AND the sounds assigned to the LINK pad will sound.

If you want to cancel this function, set the LINK to OFF. This is done by continuing tapping the footswitch past pad 24. The LINK Screen will say NO. Remember that quick-click. (release and step again). Doing this on the Note Edit Footswitch will change direction of the pad LINK Numbers.

NOTE EDIT FOOTSWITCH

Changing note numbers on the pads is a real easy task. All you have to do, is hold down the NOTE EDIT FOOTSWITCH, and while it is held down, tap on any pad.

Every other hit on that pad with the footswitch down will increment the number by one. If you want to go the other direction, use "quick click". (release and repress the footswitch). The numbers now go in

reverse order.

HEAR SOUND

When you are changing the note numbers using the NOTE EDIT FOOTSWITCH, the trapKAT automatically auditions the sound. This means that the note number that you are calling up is also being triggered, and is being sent out to the MIDI OUT jack and the internal sound card.

It is now possible to turn ON or OFF this HEAR SOUND function.

Step on the GLOBAL EDIT FOOTSWITCH, and while held down, step on the HiHAT controller pedal.

The screen will either read, “Hear Sound is On” or “Hear Sound is Off”. When you go back to the Note Edit, the result of this toggle will determine if you can hear the sounds while you are editing or not.

SPECIAL NOTE NUMBERS

Normally, MIDI note numbers go from 00-127. Each number has the ability to play a sound.

The trapKAT has SPECIAL note numbers. When scrolling past 127 using the NOTE EDIT FOOTSWITCH, you will see the special notes that aren't really notes but FUNCTIONS. These special notes do all kinds of cool things on the trapKAT. Take a look....

NO

This special note number function plays a silence when the pad is struck. If you are using one of the Alternate Mode Curves, this function allows you to have the desired number of alternating notes, but can have the option of having a silent location within the pattern. This can help create rhythmic patterns on a pad.

Sequence Start, Sequence Stop, Sequence Continue

When a pad is set to any of these functions (by its note number name), a sequence command is sent to the external and internal sound module. If the module is capable of playing sequences, then any trapKAT pad can be set to control the starting, stopping and continuing of sequences.

Alternate Reset

The Alternate Reset function resets the alternating pattern to start from the beginning. If the Alternate Reset is placed in the first position (slot #1) in Alternating Mode, then All alternating notes in the kit will be reset. If the Alternate Reset Function is placed in any of the other remaining 15 MIDI note numbers slots, then that pad will reset back to the beginning.

Alternate Freeze

The Alternate Freeze function stops the alternating pattern from advancing to the next note slot. If the Alternate Freeze is placed in the first position in Alternate Mode, then All Alternate Notes in the kit will be frozen. If the Alternate Freeze Function is placed in any of the remaining 15 MIDI note number slots, then that pad will stop advancing until Reset.

Kit Advance, Kit Backwards

If a note number is assigned to Kit Advance or Kit Backwards, striking this pad will advance or step backwards, the User Kit by one. Note that every kit must be assigned its own Kit Advance/Backwards

Function.

Pitch Wheel

If a pad note number is assigned to PITCH Wheel, then pressing on this pad will send out pitch data.

Program Advance, Program Backup

These are special functions that are designed to work only with the trapKAT 5KS.

As you may recall from the Kit Edit Section, changing programs (sounds) require a Bank (MSB/LSB) Change, and a Program Change Command on a specific MIDI channel.

We have attempted to make a shortcut on the trapKAT. Most of the drum and percussion sounds are located in Banks 4 and 5 in the sound module. The Program Advance/Backup is a special function that sends out the Bank and Program change with just one tap of the pad.

When a pad's MIDI note number is set to Program Advance or Backup, drum sounds along with the drum or percussion's name are automatically loaded into the User Kit. Every time you strike the pad, a new drum kit is loaded in. The screen also changes, displaying the Bank and Program Change that has just been loaded in. This makes it easy for you to find the drum sound that you want.

If you like a kit, and want to save it permanently in the User Kit, SAVE it by stepping on the Global Edit Footswitch and tapping on pad #21 twice.

NOTE SLOTS

The trapKAT can play up to 16 sounds on one pad. Most of the time when you are changing note numbers, you will be working on slot number 1 (of 16). If you accidentally stepped on the NOTE EDIT Footswitch and the KIT EDIT FOOTSWITCH at the same time and then struck a pad, you then switched editing to slot number 2 of 16. You can tell which slot you are working on by looking at the screen when the Note Edit Footswitch is held down. For example, you might see something like #38-01. The number 38 is the MIDI note number. The 01 represents slot 1 of 16.

Hearing these other sound slots depends on if you have a special function turned on such as Alternate Mode or Velocity Shift. These are activated in the Velocity Curve Screens. These functions are described in the KIT EDIT FUNCTIONS chapter.

If you find that you are not in slot number 1, then step on both the NOTE EDIT and KIT EDIT footswitches at the same time, and continue tapping on the pad until slot 1 rotates back on the screen.

KIT SELECT FOOTSWITCH

The trapKAT has three ways of accessing your 24 Kits. This applies to both the Factory and User Kits.

Every time you step on the KIT SELECT FOOTSWITCH, the trapKAT advances the Kit by one.

If you step on the footswitch and hold it down, and then hit a pad, the trapKAT jumps to that kit. You may recall that the trapKAT's pads numbered from 1-24 coincide with the 24 Kits that are available.

This allows for instant access jumping from any kit to any kit. Just step on the Kit Select Footswitch and type a pad.

Finally, you can set a pad to "Advance" to the next Kit or go "Backwards" to the last adjacent Kit. To do this, set the MIDI note number to "Advance" or "Backwards". These are the special note numbers that can be found past MIDI note #127. When using this function, these special MIDI notes must be programmed in every Kit. These are Kit parameters.

APPENDIX

GLOSSARY OF TERMS

Below is a list of terms that are used throughout the manual. Here are non technical explanations.

Bank Change

Changing sounds on the malletKAT require both a Program Change and a Bank Change. A Bank Change is a collection of Program Changes. Each Bank has 127 Programs in them. A Bank Command consists of two numbers MSB xx and LSB xx. On the Kurzweil, MSB are always 00. The LSB number changes the bank.

Channel

In MIDI there are 16 MIDI channels. A MIDI channel is like a phone number. For two instruments to communicate, they must talk over the same channel. This is very much like communicating with a friend on the phone. You must dial the correct phone number first.

Controller

A MIDI Controller is a device whose purpose is to control other MIDI devices (as opposed to a sound source whose job is to be controlled). Generally, a Controller is the Interface device which you play on, such as a Guitar Controller, Keyboard Controller, Drum Controller, etc.

Data Dump

The internal data information that a musical instrument sends out so that you can save its setting on a back up system.

Default

The standard, customary or “safe” value for a given setting.

Dynamics

A measure of how hard or softly you are playing with your sticks.

Editing

The act of changing the settings in a device.

Factory Kits

Kits that are always present in your instrument. These are Kits that are designed to work with General MIDI Instruments. User Kits (unmodified) are designed to work with the Kurzweil Sound Engine built into the trapKAT.

Gate Time

The length of time that a note plays as sent by the trapKAT. It is the length of time that the trapKAT waits after it sends a Note On Command, before it sends a Note Off. Many drum machines ignore the Gate Time sent by the trapKAT and sound the note until its fully “played out”. Melodic sounds like horns, strings, & organs often do respond to Gate Time.

General MIDI (GM) Sound Module

A sound module that conforms to the General MIDI specification specifying Program layout by

sound type for simple connection between MIDI devices.

Groove

A Groove is a pattern or riff that you can select to play along with. There are melodic and percussion GM grooves in the trapKAT.

Kit

A collection of MIDI Note and Channel settings for all of your pads, HiHAT and bass drum. Basically, a KIT defines what sounds your pads make. There are Factory and User Kits in the trapKAT.

MIDI

MIDI stands for Musical Instrument Digital Interface. It is an agreed upon standard for communications between electronic musical instruments. It is simply the means by which your trapKAT communicates with the sound sources you connect it to.

MIDI Delay

A term which is mistakenly used by many to refer to all kinds of delay ranging from Sound Source delay, to Sound Travel Delay, to actual delay due to MIDI. The delay caused by the transmission of MIDI information is only 1 millisecond! That's .001 of a second.

MIDI IN

A 5 pin DIN jack by which an instrument receives MIDI information from another musical instrument. Though its MIDI IN, the trapKAT can receive DATA Dumps, Kit changes and Note # Auto Train information.

MIDI OUT

A 5 pin DIN jack by which an instrument sends out MIDI information to another instrument. The trapKAT sends out Channel, Note and Velocity information and Continuous Controller messages.

NOTE NUMBER

A MIDI Note is the number sent in a MIDI Note ON or MIDI Note OFF command to tell the receiving instrument which sound (pitch) to make.

PROGRAM CHANGE

A MIDI command which instructs the receiving instrument to change a new group of settings. For Sound Sources, this generally means selecting a new group of sounds.

RESPONSE

What Velocity the trapKAT sends out related to your playing dynamics. A natural response is that the velocity (hence the loudness) gets bigger as your dynamics increase.

SCREEN

A display "window" on the trapKAT, usually with information about the current setting

SOUND SOURCE

A device that accepts MIDI input and then plays a sound based on the information it received. Drum machines, samplers and synthesizers are all examples of Sound Sources.

SOUND SOURCE DELAY

The time it takes for a Sound Source to play a sound after it has received all the MIDI information it needs. Usually this is about 2 to 15mS.

SOUND TRAVEL DELAY

The time it takes for a sound to travel through the air from the source (speakers, drumhead, etc) to our ears. Sound travels around 1.125 feet per second.

TOGGLE

To switch back and forth from one selection to another. For example, in Global Edit, pad one toggles (switches) between Factory and User Kits.

TRIGGER

Any of various external impact sensors that can be plugged into the trapKAT bass input. Normally these are foot triggers like the eKIC.

USER KIT

Kits that are changeable in your trapKAT. These are Kits that you can alter to meet your needs.

VELOCITY

A measure of how loud or soft a MIDI note will play on your sound source when playing on the trapKAT.

APPENDIX

MIDI FOR PERCUSSION

The world of Percussion has some special needs that affect how MIDI is generally used for Percussion and Drum Sounds. These special differences include how Note Offs (Gate Time) are handled, how Notes and Program Changes are used, and sensitivity to time delay and polyphony.

Keyboardists, guitarists, string, and horn players are all used to dynamically controlling the length of the Sounds they produce. This is not generally true for drummers and percussionists. Generally, once a drum is struck, it plays its sound out on its own. (Of course there are exceptions like cymbal choking and damping mallet or drum sounds - but often the sounds do play out on their own.)

Because of this, it is not unusual for a drum machine to not pay any attention to Note Off Commands. This means that generally, even if a drum machine is told to turn off a Sound after only a few milliseconds, most will play the Sound out until it is done on its own anyway. Because of this, you can choose on the trapKAT not to send any Note Off Commands - because often, for drum Sounds, they are not needed and simply fill up space in sequencers and waste the time of the Receiving Sound Source.

Another difference for Percussion is that different Note Numbers are more likely to stand for totally different Sounds - (not just different pitches of the same Sound). There are exceptions to this, but a keyboard player is more likely to think of MIDI Notes correlating to Pitch and a drummer is more likely to think of MIDI Notes as referring to totally different Sounds.

For a keyboard player, a **Program Change** Command is typically thought of as selecting some specific Sound which the MIDI Notes access different Pitches of. For a drummer, a Program Change is generally thought of as selecting a specific collection of individual sounds which specifies which different Sounds can be accessed through MIDI Note On Commands.

Because drummers and percussionists have a highly developed sense of time, they are more sensitive to time delays. A drummer is very sensitive to where a Sound is played with respect to the beat. This brings us to MIDI Delay. The MIDI time delay for a Note On Command is 1 millisecond (one thousandth of a second). It is imperceptible! (5 milliseconds (mS) is where you start to notice, 10 mS is noticeable and 20 mS is obnoxious.) (1 mS = .001 Second)

So why do we hear all this talk about MIDI Delay? Because they are really talking about **Sound Source Delay** when they talk about MIDI Delay. So what is Sound Source Delay? It is the time that it takes a Sound Source to respond to a MIDI Note On Command it has received and start to make a Sound. Sound Source delay typically ranges from 1/2 mS to 15 mS. The Sound Sources with 1/2 mS to 3 mS delay are the ones worth owning.

So if you want to avoid "MIDI Delay", avoid Sound Source Delay! Call us and we'll tell you how the current Sound Sources rate.

Interestingly enough, there is also Sound Travel Delay! It actually takes sound a noticeable time to travel through the air. Hence echoes. Hence you see lighting, then hear thunder seconds later. Specifically, sound travels 1 foot in just a bit less than 1 mS. This means that a monitor placed 10 feet from your ears will cause around 10 mS of delay - Sound Travel Delay! (There is about a 2mS

delay from when you strike your acoustic snare drum to when the sound gets to your ear!) Earphones have a Sound Travel Delay of only a teeny bit, since the little speakers inside are so close to your ears.

Looking at the actual times involved in MIDI Delay (1mS), Sound Source Delay (.5mS-15mS), and Sound Travel Delay (2-10mS), you can see that actual MIDI Delay is the least of your worries.

(By the way, a MIDI Merge (In-merged-to-Out) generally has 1 to 2 mS Processing Delay.)

Because a drum sustains *after* you hit it for some time, quick hits or rolls have essentially two or more separate acoustic sounds playing at once. Drums need polyphony per drum to sound real. The trapKAT has 4 Note polyphony per pad so that you can capitalize on any sound sources that support polyphony per note.

APPENDIX

Inserting New Software Chips For Software Updates

PHYSICALLY CHANGE YOUR SOFTWARE CHIP:

Tools Needed: 1 medium flat screwdriver.

- 1) First, remove the AC adaptor plug from the back of the trapKAT!
- 2) Find a smooth, clean, flat surface and place your trapKAT upside down on it, the jacks facing away from you.
- 3) Remove back cover of the trapKAT (16 screws).
- 4) When the trapKAT is opened, you will see one large circuit board towards the back. On the front right of the printed circuit board is a large chip with a white paper label that says something like “trapKAT 4.5”.

The chip with the white label is your Software Chip, the code that runs your trapKAT - its Operating System. Before you take the old software chip out, note how it is oriented in the socket. Specifically notice that the “notch” on the end of the chip is away from you. 5) The chip is at the top end of the circuit board. To remove an old chip, you will use your flat screwdriver. You will pry the chip out of its socket. Look at the Upgrade chip you received and you will be able to tell what is the chip and what is the socket. You want to insert the screwdriver *between* the chip and the socket so as to pry up the chip but not the socket. As you start to pry up the chip insert the screwdriver further under the chip and pry up more, then insert screwdriver even further and then pry up more until the chip comes out of the socket. Don't be scared - just pry a little bit and then push the screwdriver in further, until the chip is out. Take your time, don't be in a hurry. Make sure you insert the screwdriver *between* the chip and the socket before you start to pry each time. (Instead of between the socket and the circuit board.) 6) After you have the chip out, place the new chip in its socket, being careful to orient it in the same way that the old chip was (remember the “notch”?). Take a little care to align the legs of the chip into the holes in the pins of the socket. Then push down evenly on the chip. It should push down snugly into the socket. Visually check to see that none of the legs got squished and are smashed under the chip. 7)

Replace the back cover of your trapKAT and reinsert the 16 screws. 8) Turn your trapKAT back over, and reinsert the AC adaptor plug into the trapKAT. Now turn your trapKAT back on. If the display is working, you are OK. If the display is not working then: a) Remove the AC adaptor plug again. b) Turn the trapKAT over again and remove the 16 screws. c) Take the back cover off again. d) Try reinserting the chip (pry it out again to make sure that the legs didn't get bent under the chip). e) Put the back cover on, turn the trapKAT back over, reinsert the AC adaptor plug, and turn the power back on. f) If this still fails, put your OLD software back in and give us a call @ 413-594-5190. 9) After you have had the new software in and used it for several days, please send the old chip back to us. They are reusable.

APPENDIX WARRANTY POLICIES

The trapKAT has a limited warranty. The trapKAT is warranted against defects due to materials or workmanship for 1 YEAR ON PARTS AND LABOR, except for the FSR SENSORS which are warranted for 6 months.

Save your sales receipt, it is required for proof of warranty.

WARRANTY RESTRICTIONS

Damage or defects sustained through unauthorized repair or tampering, or abusive treatment are not covered by this warranty. The warranty does not cover damages to the trapKAT as a result of incorrect polarity AC Adaptor. The shipping expenses and arrangements for repair are the responsibility of the purchaser.

Alternate Mode is not responsible for loss of Kit Memory when your controller is sent in for repair or upgrade. Please, save your Kits on a Data Disk, Sequencer, or Computer before sending in for repair.

CARE AND MAINTENANCE

The trapKAT is an electronic musical instrument that was designed to take a pounding - from a pair of drum sticks - not from rolling down the stairs. Simply use good judgment and your trapKAT will provide you with years of enjoyment.

Don't pour or spill liquids on your trapKAT. Don't leave in a very hot car for extended periods of time. Don't leave in overly damp areas for extended periods of time.

Do not clean the pads or metal surfaces with alcohol or solvents.

If you want to clean the pads, dampen a cloth with Armor All™ and wipe the pads down. Do not squirt the liquid directly on the pad.

APPENDIX

CUSTOMER SERVICE

There are many ways of getting the customer service you need.

You can contact us at: katsales@alternatemode.com. Call us at 877-933-6237 or 413 594-5190. You can fax us at: 413-592-7987. We have a forum on our website, www.alternatemode.com as well as a knowledge base software program on the website as well. We have a Video Help Desk on the Support page of the site and finally we have live internet broadcasts on www.alternatemode.tv

IF YOU NEED TO SEND THE TRAPKAT BACK TO THE FACTORY

If you need your trapKAT repaired or worked on for any reason, call our Customer Service staff and ask for an “**RA**” number. This is a “**Return Authorization**” number. You must then clearly mark this “RA” number on the **outside of the box** you send back to Alternate Mode. When you call in your RA, our staff will ask you for information like your name, address, phone number, serial number, purchase date, software version (power-up display) and a description of the problem. All of this information is put on an “RA form” that will be used when your instrument comes in to determine what to do to your instrument and whom to send it back to.

SHIPPING: If you need to ship the trapKAT back in for a repair or an update, use care and good judgment. It is best to save the original packing material to make shipping easy and safe. If you do not have the original packing material, box the trapKAT in tight with packing noodles, paper, etc. so that it is not flopping around in the box during shipping. Leave enough space inside the box to pad the corners of the trapAKAT. **Shipping expenses and proper packing of instruments shipped to Alternate Mode are the responsibility of the consumer.**

Kurzweil Sound List 1

PC	MSB 00 LSB 04	PC	MSB 00 LSB 04	PC	MSB 00 LSB 04	PC	MSB 00 LSB 04	PC	MSB 00 LSB 04
1	Kit 1 Open Rock	26	Kit 26 Boxy Tubs	51	Kit 51 Jersey	76	Aud Kik/Sn Streo		
2	Kit 2 SquashRock	27	Kit 27 West Boxy	52	Kit 52 HardKnock	77	Stereo KickDrums		
3	Kit 3 Full Room	28	Kit 28 Big Buzz	53	Kit 53 CoralBox	78	Mono Kick Drums		
4	Kit 4 East Space	29	Kit 29 Schnizzle	54	Kit 54 Cold Cash	79	StereoSnareDrums		
5	Kit 5 CopperRing	30	Kit 30 Bonzo'sRm	55	Kit 55 Spoooge	80	Mono Snare Drums		
6	Kit 6 Birch Wood	31	Kit 31 Old Traps	56	Kit 56 DJ-Dub	81	Tom-toms		
7	Kit 7 DeadRocker	32	Kit 32 Fat Boy	57	Kit 57 Beatbx101	82	Hi-hats		
8	Kit 8 Ring-tone	33	Kit 33 ModernRok	58	Kit 58 Rhythmcon	83	Rdes&Crshs&Rolls		
9	Kit 9 Gadd'sLair	34	Kit 34 80'sPower	59	Kit 59 Superfly	84	E Perc/SoundFX		
10	Kit 10 Hinomaru	35	Kit 35 WoollyPckt	60	Kit 60 Lay Down	85	Vocal Percussion		
11	Kit 11 KirkeeB 1	36	Kit 36 Reso-King	61	Kit 61 TrashFunk	86	Drum Percussion		
12	Kit 12 25thAnniv	37	Kit 37 Los Feliz	62	Kit 62 RadioEcho	87	WoodMetlShakPerc		
13	Kit 13 LA A Kit1	38	Kit 38 Mahogany	63	Kit 63 TouchTone	88	VRT Accessory A		
14	Kit 14 LA A Kit2	39	Kit 39 80's PTS	64	Kit 64 Sweeper	89	VRT Accessory B		
15	Kit 15 LA A Kit3	40	Kit 40 FabFringe	65	Kit 65 ScratchMe	90	VRT Accessory C		
16	Kit 16 LA B Kit1	41	Kit 41 LouStools	66	Kit 66 Ice Heart	91	VRT BongoConga		
17	Kit 17 LA B Kit2	42	Kit 42 Orngcrush	67	Kit 67 ChakraJam	92	VRT Bendir		
18	Kit 18 LA B Kit3	43	Kit 43 Static	68	Kit 68 Voice Box	93	VRT Bodhran		
19	Kit 19 Pomele	44	Kit 44 LiteBrite	69	Kit 69 6 Mil\$Man	94	VRT BodhrnBendir		
20	Kit 20 KirkeeB 2	45	Kit 45 Brush 1	70	Strange Hits	95	VRT Djembe		
21	Kit 21 J Geils	46	Kit 46 Brush 2	71	Strange Hits2	96	VRT DumbekDjembe		
22	Kit 22 Tightie	47	Kit 47 PillowFuz	72	VinyINoyzComboMW	97	VRT FrameDrums		
23	Kit 23 Low Rock	48	Kit 48 Thigpen	73	Recrd Start/Stop	98	VRT FrameHybrid		
24	Kit 24 Drum&Bass	49	Kit 49 Fnessence	74	5 Kits Temple 1	99	VRT Gourd		
25	Kit 25 Flabby	50	Kit 50 Proc Pop	75	Aud Kik/Snr Mono	100	VRT Tabla		
						101	VRT TalkingDrum		

Kurzweil Sound List 2

PC	MSB 00 LSB 05	PC	MSB 00 LSB 05	PC	MSB 00 LSB 04	PC	MSB 00 LSB 05	PC	MSB 00 LSB 05
1	Brt Natural Kit	26	AngryBastard Kit	102	PERC KatManDude	102	AngryBastard Kit	52	Backsweep Kit
2	SmoothRocker Kit	27	Vibra Lunch Kit	103	PERC PolyRitmico	103	Vibra Lunch Kit	53	Bug Zapper Kit
3	Low Rocker Kit	28	Ricochet Kit	104	PERC Carnival	104	Ricochet Kit	54	Elektro Sand Kit
4	SuperNatural Kit	29	Frida's Gate Kit	105	HIT'n Rung 1	105	Frida's Gate Kit	55	Sandy Bott'm Kit
5	Big Woosh Kit	30	Metallic Cut Kit	106	HIT'n Rung 2	106	Metallic Cut Kit	56	Box o' Sand Kit
6	Fat Nat Kit	31	Cannibal Kit	107	HIT'n Rung 3	107	Cannibal Kit	57	Fine Grit Kit
7	Abe Junior Kit	32	Tunnel Feel Kit	108	HIT'n Rung Keys	108	Tunnel Feel Kit	58	Matchmaker Kit
8	Charlemagne Kit	33	Tuna Slap Kit	109	KEY SoftBars	109	Tuna Slap Kit	59	Zucchinni Kit
9	H-Fact Kit	34	Plywood Kit	110	KEY XyLoomBa	110	Plywood Kit	60	Pump da Well Kit
10	SoftCookie Kit	35	Door Knocker Kit	111	KEY Asian Metal	111	Door Knocker Kit	61	L'trk Reflux Kit
11	Brushes Kit	36	Slapstick Kit	112	KEY TablaBars	112	Slapstick Kit	62	Squash Clap Kit
12	HipgigJunior Kit	37	Scratchbox Kit	113	KEY SlitBars	113	Scratchbox Kit	63	Scoopit Up Kit
13	Cocktail Kit	38	Anvil Head Kit	114	KEY GourdBars	114	Anvil Head Kit	64	Tone Keeper Kit
14	BeatBoxBrush Kit	39	Cat Scratch Kit	115	KEY MamboBars	115	Cat Scratch Kit	65	Phase "E" Kit
15	Jinglehop Kit	40	Scream Kit	116	MIXnMatch Perc1	116	Scream Kit	66	Straw Blow Kit
16	Tiny Bopper Kit	41	Mangled Kit	117	MIXnMatch Perc2	117	Mangled Kit	67	Falling Star Kit
17	Move'n Air Kit	42	Rawhide Kit	118	MIXnMatch Perc3	118	Rawhide Kit	68	Super Ball Kit
18	Ali's Punch Kit	43	Shrugie Kit	119	MIXnMatch Perc4	119	Shrugie Kit	69	Pixie Dust Kit
19	Rock Trance Kit	44	Big Dog Kit	120	ATM HoldnSlide	120	Big Dog Kit	70	Air Waves Kit
20	Ringling Pop Kit	45	Sweeper Kit	121	ATM Birdy Birdy	121	Sweeper Kit	71	Tub Floater Kit
21	Marley Kit	46	Gravel Dump Kit	122	ATM SacredShrine	122	Gravel Dump Kit	72	Why Not Kit
22	L'tric Nat Kit	47	Mudflap Kit	123	ATM Tera Nova	123	Mudflap Kit	73	Turntablism Kit
23	TrashPanTom Kit	48	Mud Slinger Kit	124	ATM Oody Oody	124	Mud Slinger Kit	74	Stud3and4C
24	Tin Man Kit	49	Shrug's Bros Kit	125	ATM FlexiCrotale	125	Shrug's Bros Kit	75	RadKings3
25	Cheapo Dist Kit	50	Wet Sponge Kit	126	ATM Bit'aGlitter	126	Wet Sponge Kit	76	ResonantTraps
		51	Succotash Kit	127	ATM Drip'nGlitr	127	Succotash Kit	77	Ambient Rock1

Kurzweil Sound List 3

PC	MSB 00 LSB 05	PC	MSB 00 LSB 00	PC	MSB 00 LSB 00	PC	MSB 00 LSB 00	PC	MSB 00 LSB 00
78	Coliseum Kit	1	Standard Grand	27	Supertramp Wurly	54	OleTime Gospel		
79	RipperKit1	2	Studio Grand	28	FlydDarkside/Wah	55	FooledAgnVox		
80	TripTrash	3	RubensteinSWComp	29	What'd I SayWrlly	56	BostonScreamer		
81	Beatbox2	4	Horowitz Grand	30	DeepFuzz Wurly	57	Power Pop Horns		
82	SumpKit1 MWSus	5	NYC Jazz Grand	31	No Quarter Pnt	58	Sax/Trumpet Sctn		
83	ElectroKit2MW	6	Pop Power Piano	32	MistyMountain EP	59	BigBand/AMradio		
84	Paper Tom	7	ColdPiano	34	AcidJazzVelFlute	60	MeanSalsaSection		
86	GlubFlangeKit	8	Grand "Evans"	35	TimbaSynth	61	R&B/Funk Section		
87	DryFattyKit	9	Blues Piano 1974	36	Blue PVC Tubes	62	Bassie Orchestra		
88	Drums w Bass 1	10	Rock Piano 1974	37	SimpleHipHopLead	63	P*Funk Horns		
90	GateClapDrumLE	11	Lola Piano	38	Stereo TouchKoto	64	70s Stones Horns		
91	Dub Kit	12	TakeMeToThePilot	38	Modwheel DJ	66	DarkNYCStudio		
92	Rock Room Drums	13	Deb's Ghost Pno	40	Retro Sparkle	67	Pop Tripper Str		
93	ResNoise Kit	14	Ken Brns Uprigt	41	RealSupasticious	69	Vienna Octaves		
94	144ms Gated Kit	15	SMILE/RkyRaccoon	42	Joe's Clav	71	Pizzicato		
95	FatNoise Kit	16	Piano & String	43	Rufus/Marley WAH	72	Tremolando		
96	Hypd Natural Kit	17	Beaten in Rhds	44	Black Cow Clav	73	Choir Complete		
97	Rango Kit	18	Stevie's Rhds	45	Hiya Ground sw	74	Haah Singers		
98	NoiseSlapToms	19	Gilpin'sSuitcase	46	TrampledUnder D6	75	Manhattan Voices		
99	16LayerCake Kit	20	Duke's Dyno Rhds	47	Harpichord	76	Aaahlicious		
100	HopRoom Kit	21	MotorBootyMutron	48	BriteHarpichord	77	NYC in LA		
101	Natural Ringer	22	Sweet Loretta EP	49	Gregg's B	78	Crystal Voices		
102	BeachGroover	23	Rhds/WahSW	50	Real AllOut B	79	Airy Pad		
103	Rock Snarer	24	Hotrod Dyno Rhds	51	Clean Perc	80	Cathedral Vox		
104	Drum Pad Kit 1	25	WoodstockClunker	52	The Ninth Bar	81	Classic Comp		
105	Filter Kit	26	Stage Mix Wurly	53	Lord's B3 MW	82	Fitty-Fitty Lead		

Kurzweil Sound List 4

PC	MSB 00 LSB 00	PC	MSB 00 LSB 00	PC	MSB 00 LSB 01	PC	MSB 00 LSB 01
83	Big Old Jupiter	110	Jaco Fretless	1	Piano Stack	29	Crisp and Soft
84	9Yards Bass	111	Upright Growler	2	Dark Grand	30	Soft Warm Ballad
85	BowhSaw Bass	112	Levin/GabrielFrtls	3	Grand Piano 440	31	TX Stack
86	ARPesque Bass	113	NYC Kits	4	Piano Recital	32	Tight Bright FM
87	DaywalkerBassMW	114	LA Kits	5	Ole Upright 1	33	PolyTechnobreath
88	Harpolicious	115	Rock Kits	6	WestCoastPno&Pad	34	PianoSynth Stack
89	Slo QuadraPad	116	Roots/Indie Kit	7	Perfect PnoPad	36	BigSyn/HornStack
90	Phase Shimmer	117	Kikz/Snarz MW	8	Dreamy Piano	37	'70s Arena Synth
91	Le Pesque	118	EarthKikz n Snrz	9	Piano w DvStrgs	38	'80s Arena Synth
92	Wispy One	119	Anazlog Machine	10	PhoAgtStrngs	39	'90s Funk Stack
94	Fairlight Pad	120	Produced Kit '08	12	DancePhoEchplex	40	Nexx Prog Stack
95	Tronesque	121	Natural Perc	13	Ivory Harp	41	Crisp Clav
96	So Lush Pad	122	Rhythm 4 Reel	14	Piano Lushness	42	Stevie Fuzz
97	Boutique Six Str	123	New Marimba	15	Piano & Wash	43	HeartbreakerWAH
98	Boutique 12 Str	124	2-HandSteelDrums	16	Piano & Vox Pad	44	ChocolateSaltyCiv
99	Emo Verser	125	Real Vibes	17	XfadBelltoneRhds	45	SailinShoes Clav
100	Voxxed Elec 12	126	SteamPunkMallets	18	Extreme Hardstrk	46	StopMakingSense
101	Real Nylon	127	Magic Celeste	19	Fagen Phaser	47	Harpsi Rotovibe
102	Dual Strat	128	Drums 'n Bells	20	RoyalScam Rhds	48	PhsyncGraffitiCiv
103	BurningTubes MW			21	AustnCtyLmthsWrly	49	ParisCmboAccordn
104	Rockin' Lead MW			22	BrightDynamicWly	50	WhiterShadeB3
105	P-Bass			23	'70sWahLeslieEP	51	Doors Vox
106	E-Bass			25	Classic DX Rhds	52	Indagardenoveden
107	Beasties Bass			26	Rich EP+Pad	53	Animals Vox
108	Flea/Bootsy			27	90's FM Shimmer	54	Magic Wolf
109	Big Dummy			28	Bright HardstrEP	55	Farfisa 1

Kurzweil Sound List 5

PC	MSB 00 LSB 01	PC	MSB 00 LSB 01	PC	MSB 00 LSB 01	PC	MSB 00 LSB 01	PC	MSB 00 LSB 02
56	VAST1-3,8&9	84	SynBell Morph	110	Lowdown Bass	17	VA1 Saw Lead		
57	1-Note PowerRiff	85	Perc>Morph>Bass	111	Eberhardt Frtls	18	VA1 Sqr Lead		
58	Miami Pop Horns	86	EvilOctaveWheel	112	Sly Bass	19	MaroonSynBass		
59	80sPopOctaveSax	87	TranceRiff	113	Maroon Drums	20	VA1DistBassSolo!		
60	BuenaVista Brass	88	SickoSynco	114	BourneRemixDrum	21	DownwardSpiralMW		
61	Tenor Express	89	Buzzy Strings	115	BeastieRetroDrum	22	VA1DstPulseWheel		
62	Sgt.Pepper Brass	90	VA1Saw/Sqr/Pulse	116	DryPumpin'Drums	24	VA1 DetunedPulse		
63	Goldfinger Brass	91	Airy Impact	117	'60s Rock&Soul	25	VA1 Detuned Saws		
64	Bari/TenorSect	92	Spider's Web	118	Headhunters Kit	26	VA1 Detuned Sqrs		
65	Studio A Strings	93	ARP Big Synth	119	FranticHouseDrms	27	VA1 Emerson Lead		
66	Studio B Octaves	94	Class Pad	120	Dance/Marilyn	28	MwhlClubsweeper		
69	Owen's Strings	95	HarmonicEnvelops	121	Mellow Marimba	29	Innervate		
70	Studio C Strings	96	Heaven & Earth	122	Skullophonic	30	ChemBrosBassLead		
71	Tender Strings	97	Bling 6 String	123	Percussionist	31	UFO Pad		
72	Toxic Strings	98	MediumCrunchLead	124	Shiny Sparkles	32	VA1SliderMorphSQ		
73	Mixed Choir	99	DoubleCleanChris	125	HybridTuned Perc	48	Preston SpaceWah		
74	Concert Choir	100	Comp'd Phaser	126	Dynamic Perc	49	Analog/DigHybrid		
75	Aaah Vocals	101	TremBucker	127	Cage's Ensemble	50	Jump! Obx		
76	Jazzy Ballad Vox	102	Cascade Sitar	128	Magic Mbira	51	'80s End Credits		
77	AntiqueAhhChorus	103	Heavy Buckers			52	VA1Distlead CC		
78	Bright Syn Vox	104	Nasty'70s Guitar			53	Divider		
79	Vox Orgel	105	Finger Bass			54	Mono Trekkies		
80	Vox & Strings	106	KneeDeepMinimoog			55	Disco Divebomb		
81	Press Lead	107	AC Buzzer Bass			56	MutronTweetyPerc		
82	ClassSquare	108	Motown Bass			57	Disgusting Bass		
83	ARP2500 Brass	109	Squire'sHeavyPik			58	VA1ShaperSweeper		

Kurzweil Sound List 6

PC	MSB 00 LSB 02	PC	MSB 00 LSB 03	PC	MSB 00 LSB 03	PC	MSB 00 LSB 03	PC	MSB 00 LSB 03
59	ElectroPercSynth	1	Winds & Strings	51	Solo Clarinet	77	Trombone Section		
60	MWHiMayhemBass	2	Winds, Horn & Str	52	Slo OrchClarinet	78	Dyn Orch Bones		
61	ElectronicaSplit	4	LH Timp Roll Orch	53	Fast Orch Clar	79	Bari Horn Section		
62	HiPassMWhlBlips	7	Poltergeist Trem	54	Lead Clarinet	80	Dyn Bari Horns		
63	Plasma Cannon	9	Pizz w/PercUpTop	55	Solo Bassoon	81	Solo Tuba		
64	32 Layer Bass!	11	Fast Winds &Pizz	56	Solo Bassoon vib	82	Dyn Orch Tuba		
104	St.P PWM BASS	24	Strings & Silver	57	Solo Dbl Reeds	83	Low Orch Brass		
105	SquareChirpLead	25	Reeds & Bells	58	Woodwind Section	84	Low Brass Chorale		
110	Synbrass Pillow	26	Perc Atk Strings	59	Ensemble WWinds	85	Fast Orch Brass		
113	Outkast Drums	29	Orch w/ Bells On	60	BassClar/Clar/Fl	86	Brass Fanfare		
114	PopRock'08 Kit	31	Horns,Winds&Str	61	Solo Fr Horn	87	Dyn Orch Trumpets		
115	Hello Brooklyn	34	StBaroque Harpsi	62	Ensemble Fr Horn	88	Solo Violin fast		
116	Snoop Kit	35	String Continuo	63	Lead French Horn	89	Folk Violin slow		
117	EpicRemixDrums	38	Fifes & Drums	64	Dyn Orch Fr Horns	90	Solo Viola fast		
118	ZooYorkRemixDrms	39	Solo Flute	65	HornSect Layer	91	Solo Viola slow		
119	Roc-A-Fella Kit	40	Tremolo Flute	66	Solo BrtTrumpet	92	Solo Cello fast		
120	Breakestra Kit	41	Fast Orch Flute	67	Hard Trumpet	93	Solo Cello slow		
122	DigitalMoonscape	42	Piccolo	68	Lead Trumpet	94	Solo Basso 1		
123	Falgor'sLament	43	Solo Oboe	69	Soft Trumpet	95	Solo Basso 2 slo		
124	BPM BionicStrngs	44	Slow Oboe	70	Slow Soft Trp	96	String Quartet		
127	MeanStereoSweep	45	Fast Orch Oboe	71	Two Lead Trumpets	97	Solo Harp		
128	PulseVowel	46	Lead Oboe	72	Lead MuteTrumpet	98	Orch Harp 1		
		47	Solo Eng Hrn prs	73	Solo Tenor Sax	99	Delicate Harp		
		48	Fast Orch EngHrn	74	Sax,Horns,MuteTrp	100	HarpArps & Gliss		
		49	Slow EngHorn prs	75	Solo Trombone	101	Slo Orch Chorus		
		50	Lead English Horn	76	Ens Trombone	102	Pipe Stops		

Kurzweil Sound List 7

PC	MSB 00 LSB 03	PC	MSB 00 LSB 06	PC	MSB 00 LSB 06	PC	MSB 00 LSB 06	PC	MSB 00 LSB 06
103	Soft Stops	1	FM E Piano 1	27	16' Open Flute	53	4' Reed		
104	All Stops	2	FM E Piano 2	28	16' Stop Flute	54	4' Gamba		
105	Chapel Organ	3	Hybrid DX & Pad	29	16' Diapason	55	4' DiaCeleste		
106	AllStops AllVox	4	FluidStradaGtr	30	16' Ped Bourdon	56	4' Ballpark Stop		
107	Pipes & Voices	5	Fluid E Gtr	31	16' Ped Diapason	57	4' Viol		
108	Orch Timpani	6	OrganWaveComper	32	16' Ped Reed	58	2 2/3' OpenFlute		
109	Solo Timpani	7	Poly Brassy	33	16' Reed A	59	2 2/3' StopFl 12		
110	Tam/Cym/BD/Timp	8	SynBrass Comper	34	16' Reed B	60	2 2/3' Diapason		
111	Basic Orch Perc	9	PolyPitch Brass	35	16' Gamba	61	2 2/3' Reed		
112	Timp & Aux Perc	10	Poly Sweep 2	36	16' DiaCeleste	62	22/3' Gamba		
113	Temple Blocks	11	Scat Vocals	37	16' Ballpark Sto	63	2 2/3' DiaCelest		
114	Modern Blockery	12	Scat Choir	38	16' Viol	64	22/3' Ballpark S		
115	Perc & Blocks	13	FM SqareBell	39	8' Open Flute	65	2 2/3' Viol		
116	Stereo Tam-tam	14	Toot Lead	40	8' Stop Flute	66	2' Open Flute		
117	Cymbal Roll Tr	15	WetToot	41	8' Diapason	67	2' Stop Flute		
118	Xylophone	16	LegatoBrassyLead	42	8' Ped Bourdon	68	2' Diapason		
119	Solo Marimba	17	Treble FM Lead	43	8' Reed	69	2' Reed		
120	Orch Marimba	18	Delicate FM Lead	44	8' Gamba	70	2' Gamba		
121	Vibraphone	19	Micromoog Plus	45	8' DiaCeleste	71	2' DiaCeleste		
122	Celeste	20	Deep Vox Bed	46	8' Ballpark Stop	72	2' Ballpark Stop		
123	Glockenspiel	21	StoSynOrch Wet	47	8' Viol	73	2' Viol		
124	Chimes/Glock	22	Vox Bed 2	48	51/3' Ped Bourd.	74	Rich Marimba		
125	Bells Across	23	Hi Vox Cloud	49	4' Open Flute	75	Tempered Marimba		
126	CelesteGlockHarp	24	LFO Pitcher Pad	50	4' Stop Flute	76	Lonely Marimba		
127	Chime Bell	25	MagicChinaFlower	51	4' Diapason	77	Marimba Plate		
128	Carillon	26	Climax Perc	52	4' Ped Bourdon	78	Thick Flt Marimb		

Kurzweil Sound List 8


PC	MSB 00 LSB 06	PC	MSB 00 LSB 07	PC	MSB 00 LSB 07	PC	MSB 00 LSB 07	PC	MSB 00 LSB 07
79	Soft Marimba	1	Ezra's Burner	28	Wah B3+EchoplX	54	LeeMichaelsB3		
80	Subtle Marimba	2	HotTubeGospel	29	Sweet n Nice	55	GM Standard Kit		
81	Rubber Marimba	3	B3 Midrange	30	Soft Chords	56	GM Room Kit		
82	Marimba Squash	4	Blues&Gospel	31	SputtringingB3	57	GM Power Kit		
83	Cold Marimba	5	Prog B3 Perc2	32	Melvin C.	58	GM Elec Kit		
84	Double Marimba	6	Prog B3 Perc3	33	All Out	59	GM Synth Kit		
85	Marimba Echos	7	Tube B3 Perc	34	J's Comper	60	GM Jazz Kit		
86	Canyon Marimba	8	Prog B3 Perc4	35	Brother Jack	61	GM Brush Kit		
87	Marimba Abyss	9	BrgtTubeScream	36	Model One	62	GM Orch Kit		
88	Vibe Dream	10	Zepelin Solo	37	Thick Gospel	63	VAST1-3Ch/Perc		
89	Mello Vibraphone	11	Argent B3	38	Growler B	64	VAST1-3 Ch/Perc2		
90	Thick Vibes	12	MusselShoalsB3	39	Ready 2 Rock	65	Fisher's VAST B3		
91	Creamy Vibes	13	XtremTubeB3Prc	40	Thimmer	74	Blues Harmonica		
92	Golden Vibes	14	Classic Traffic	41	The Real ABC	75	WheelBowCello		
93	Chorus Vibes	15	Warm B3	42	GospelSpecial	76	WheelBowViola		
94	Vibes in Phase	16	Warmer B3	43	In The Corner	77	WheelBowFiddle		
95	Vibe Trance	17	ChrsEchoOrgan	44	NightBaby	78	Electric Cello		
96	Surreal Vibes	18	SlowPhaseOrgan	45	Gimme Some	82	Classic MiniBass		
97	Cyrstal Vibes	20	Lord'sDirtBomb	46	The Grinder	83	TalkWahPoly+Syn		
98	BriteSwirl Vibes	21	Mellow Mitch	47	Mean Bean	84	MeanWahMono		
		22	Sly's Revenge	48	Dew Dropper	85	Bass Pedal		
		23	LateNighter	49	Two Out	86	SyncSqr Template		
		24	FirebreatheC3	50	J's All Out	87	CarpenterSndtrck		
		25	Mr Smith	51	My Sunday	89	PannerTemplate		
		26	Errol G.	52	Good Starter	92	Candy*O SyncLead		
		27	Testify	53	Sacrificer	93	WheelSyncBlips		

Kurzweil Sound List 9

PC	MSB 00 LSB 07	PC	MSB 00 LSB 07	PC	MSB 00 LSB 32	PC	MSB 00 LSB 32
94	12SAWMWheelLead	120	Cars Square Lead	1	GM Piano 1	27	Jazz Guitar
95	HotMalletMWheel	121	Data Shape Saw	2	Bright Grand	28	Clean E Gtr
96	ScreamInWhiBass	122	Saw+Mogue 4Pole	3	Electric Grand	29	Muted Guitar
97	SyncWheelLead	123	VA1NakedPWMPoly	4	Honky-Tonk Pno	30	Overdrive Gtr
98	ModwheelKotoSyn	124	VA1NakedPWMMono	5	Elec Piano 1	31	Distorted Gtr
99	VASprSaw	125	VA1NakedSawPoly	6	Elec Piano 2	32	Gtr Harmonics
100	VASprSaw+Allpass	126	VA1NakedSqrPoly	7	Harpichord	33	Acoustic Bass
101	Silent Program	127	VA1NakedSqrMono	8	Clavinet	34	Finger Bass
102	Click Track	128	VA1NakedSawMono	9	GM Celesta	35	Picked Bass
103	Default Program			10	Glockenspiel	36	Fretless Bass
104	Diagnostic Sine			11	Music Box	37	Slap Bass 1
105	ProphT V Sync Ld			12	Vibraphone	38	Slap Bass 2
106	Tempo SyncPulse			13	Marimba	39	Synth Bass 1
107	Slo Syn Orch			14	Xylophone	40	Synth Bass 2
108	Anabrass			15	Tubular Bells	41	Violin
109	Fat Syn Orch			16	Dulcimer	42	Viola
110	WheelGrowlMoogoe			17	Drawbar Organ	43	Cello
111	The Way It Is			18	Perc Organ	44	Contrabass
112	AlphaCentauri			19	Rock Organ	45	Tremolo Strings
113	SynOrcWhaleCall			20	Church Organ	46	Pizz Strings
114	Downes Lead			21	Reed Organ	47	Harp
115	Minipulse 4Pole			22	GM Accordion	48	Timpani
116	BPM Lead			23	Harmonica	49	Ensemble Strings
117	GatedSqrSweepBPM			24	Bandoneon	50	GM Slow Strs
118	BPMEchoPlexPad			25	Nylon Guitar	51	Synth Strings 1
119	GatedNoisweepBPM			26	Steel Str Gtr	52	Synth Strings 2

Kurzweil Sound List 10

PC	MSB 00 LSB 32	PC	MSB 00 LSB 32	PC	MSB 00 LSB 32
53	Choir Aahs	79	Whistle	105	Sitar
54	Voice Oohs	80	Ocarina	106	Banjo
55	Synth Vox	81	Square Wave	107	Shamisen
56	Orchestra Hit	82	Sawtooth Wave	108	Koto
57	Trumpet	83	Synth Calliope	109	Kalimba
58	Trombone	84	Chiffer Lead	110	Bagpipe
59	Tuba	85	Charang	111	Fiddle
60	Muted Trumpet	86	Solo Vox	112	Shanai
61	French Horn	87	5th Saw Wave	113	Tinkle Bell
62	Brass Section	88	Bass & Lead	114	Agogo
63	Synth Brass 1	89	Fantasia	115	Steel Drums
64	Synth Brass 2	90	Warm Pad	116	Wood Block
65	Soprano Sax	91	Polysynth	117	Taiko
66	Alto Sax	92	Space Voice	118	Melodic Tom
67	Tenor Sax	93	Bowed Glass	119	Synth Drum
68	Baritone Sax	94	Metal Pad	120	Reverse Cymbal
69	Oboe	95	Halo Pad	121	Gtr Fret Noise
70	English Horn	96	Sweep Pad	122	Breath Noise
71	Bassoon	97	Ice Rain	123	Seashore
72	Clarinet	98	Soundtrack	124	Bird
73	Piccolo	99	Crystal	125	Telephone
74	Flute	100	Atmosphere	126	Helicopter
75	Recorder	101	Brightness	127	Applause
76	Pan Flute	102	Goblins	128	Gun Shot
77	Bottle Blow	103	Echo Drops		
78	Shakuhachi	104	Star Theme		

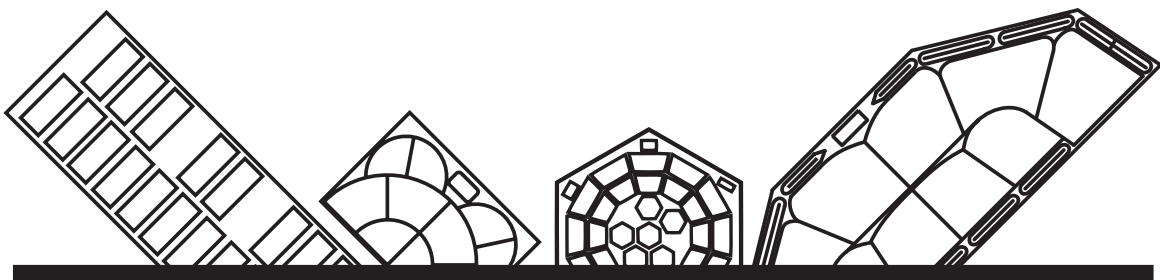

www.AlternateMode.com

KAT Percussion Controllers and Accessories

53 FIRST AVE., CHICOPEE, MA 01020 • TEL. 413-594-5190 FAX. 413-592-7987